



FusionSolar[®] Residential & Commercial Smart PV Solution

[SOLAR.HUAWEI.COM/EU/](https://solar.huawei.com/eu/)



HUAWEI

About Huawei

Huawei is a leading global provider of information and communications technology (ICT) infrastructure and smart devices. With integrated solutions across four key domains – telecom networks, IT, smart devices, and cloud services – we are committed to bringing digital to every person, home and organization for a fully connected, intelligent world. Huawei's end-to-end portfolio of products, solutions and services are both competitive and secure. Through open collaboration with ecosystem partners, we create lasting value for our customers, working to empower people, enrich home life, and inspire innovation in organizations of all shapes and sizes. At Huawei, innovation focuses on customer needs. We invest heavily in basic research, concentrating on technological breakthroughs that drive the world forward.



Employees
195,000+



R&D Personnel
107,000+



Countries
170+



Brands Finance
Global 500
9




Fortune Global 500
44



R&D Investment
2

Residential Smart PV Solution

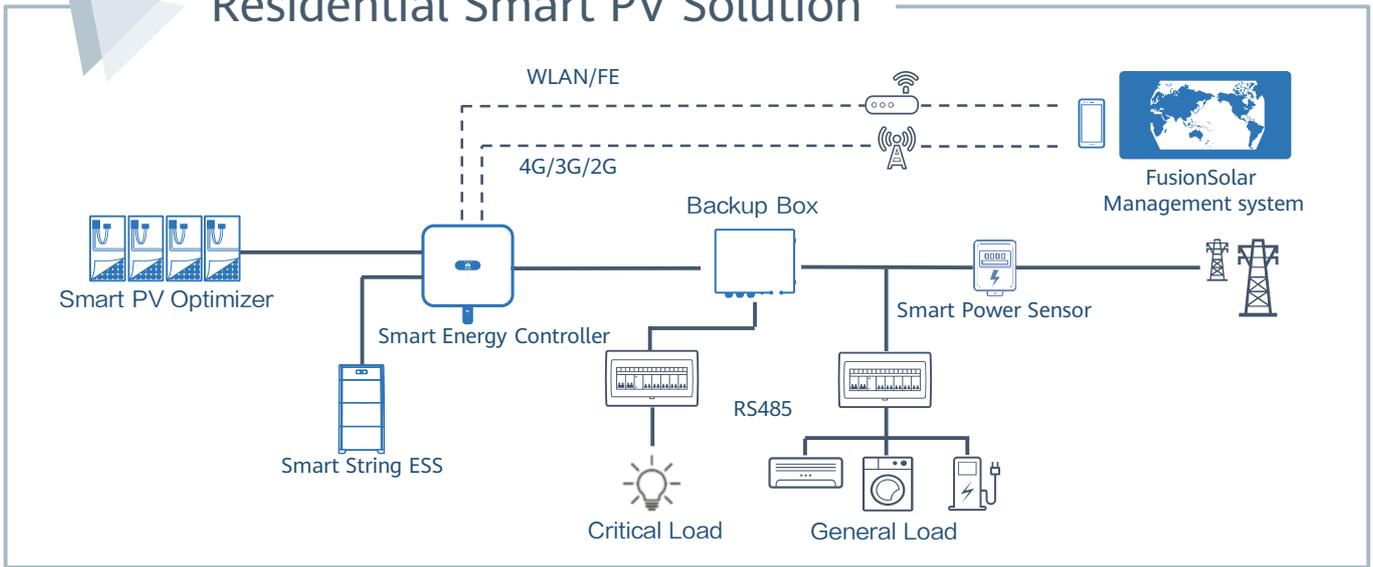

Optimal Electricity Cost

Up to 30% More Energy by Optimizers

2x POWER Battery Ready for More Energy Consumption

Active Safety

AI Powered Active Arcing Protection

Pinpoint Arc Fault Positioning

Better Experience

One-Fits-All Solution, Easier Business

Module Auto-Mapping within 5 sec



SUN2000-2-6KTL-L1 Smart Energy Controller



Active Safety

AI Powered
Active Arcing Protection





Higher Yields

Up to 30% More
Energy with Optimizer



2x POWER Battery Ready

5KW AC Output plus
5KW Battery Charge

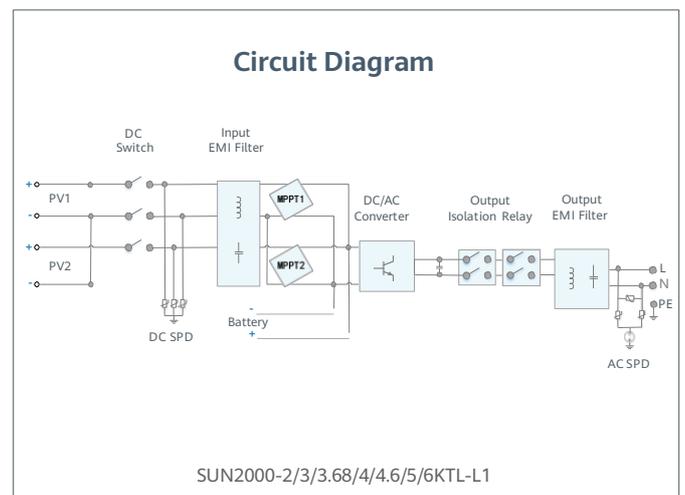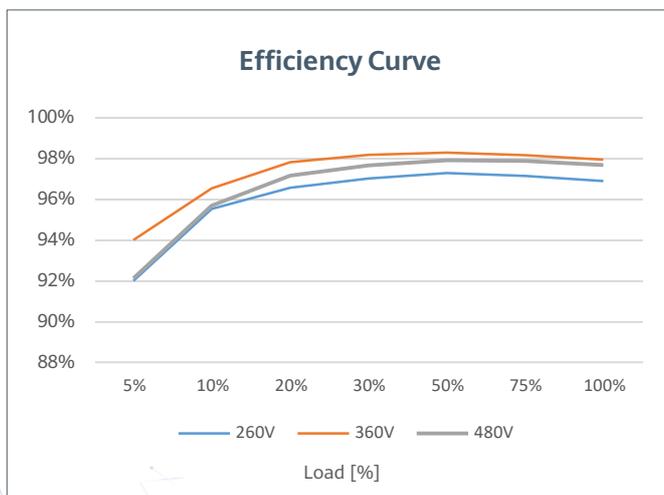

SUN2000-2/3/4/5/6KTL-L1
Technical Specification

| Technical Specification | SUN2000 -2KTL-L1 | SUN2000 -3KTL-L1 | SUN2000 -3.68KTL-L1 | SUN2000 -4KTL-L1 | SUN2000 -4.6KTL-L1 | SUN2000 -5KTL-L1 | SUN2000 -6KTL-L1 ¹ |
|-------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------|---------------------|----------------------------------|
|-------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------|---------------------|----------------------------------|

Efficiency

| | | | | | | | |
|------------------------------|--------|--------|--------|--------|--------|--------|--------|
| Max. efficiency | 98.2 % | 98.3 % | 98.4 % | 98.4 % | 98.4 % | 98.4 % | 98.4 % |
| European weighted efficiency | 96.7 % | 97.3 % | 97.3 % | 97.5 % | 97.7 % | 97.8 % | 97.8 % |

Input (PV)

| | 3,000 Wp | 4,500 Wp | 5,520 Wp | 6,000 Wp | 6,900 Wp | 7,500 Wp | 9,000 Wp |
|--|----------|----------|----------|---------------------------|----------|----------|----------|
| Recommended max. PV power ² | | | | 6,000 Wp | 6,900 Wp | 7,500 Wp | 9,000 Wp |
| Max. input voltage | | | | 600 V ³ | | | |
| Start-up voltage | | | | 100 V | | | |
| MPPT operating voltage range | | | | 90 V – 560 V ³ | | | |
| Rated input voltage | | | | 360 V | | | |
| Max. input current per MPPT | | | | 12.5 A | | | |
| Max. short-circuit current | | | | 18 A | | | |
| Number of MPP trackers | | | | 2 | | | |
| Max. input number per MPP tracker | | | | 1 | | | |

Input (DC Battery)

| | | | | | | | |
|-------------------------|--|---------|---------|---------|---------|---------|--------|
| Compatible Battery | HUAWEI Smart ESS Battery 5kWh – 30kWh ¹ | | | | | | |
| Operating voltage range | 350 ~ 560 Vdc | | | | | | |
| Max operating current | 15 A | | | | | | |
| Max charge Power | 5,000 W | | | | | | |
| Max discharge Power | 2,200 W | 3,300 W | 3,680 W | 4,400 W | 4,600 W | 5,000 W | 5000 W |

Output (On Grid)

| | | | | | | | |
|--------------------------------|---|---------|---------|----------|----------|---------|----------|
| Grid connection | Single phase | | | | | | |
| Rated output power | 2,000 W | 3,000 W | 3,680 W | 4,000 W | 4,600 W | 5,000 W | 6,000 W |
| Max. apparent power | 2,200 VA | 3,300 W | 3,680 W | 4,400 VA | 5,000 VA | 5,500 W | 6,000 VA |
| Rated output voltage | 220 Vac / 230 Vac / 240 Vac | | | | | | |
| Rated AC grid frequency | 50 Hz / 60 Hz | | | | | | |
| Max. output current | 10 A | 15 A | 16 A | 20 A | 23 A | 25 A | 27.3 A |
| Adjustable power factor | 0.8 leading ... 0.8 lagging | | | | | | |
| Max. total harmonic distortion | ≤ 3 % | | | | | | |
| Backup power output | Yes (via Backup Box-5000 ¹) | | | | | | |

Protection & Feature

| | |
|------------------------------------|--|
| Anti-Islanding protection | Yes |
| DC reverse polarity protection | Yes |
| Insulation monitoring | Yes |
| DC surge protection | Yes, compatible with TYPE II protection class according to EN/IEC 61643-11 |
| AC surge protection | Yes, compatible with TYPE II protection class according to EN/IEC 61643-11 |
| Residual current monitoring | Yes |
| AC overcurrent protection | Yes |
| AC short-circuit protection | Yes |
| AC overvoltage protection | Yes |
| Over-heat protection | Yes |
| Arc fault protection | Yes |
| Battery reverse charging from grid | Yes |

General Data

| | |
|------------------------------------|--|
| Operating temperature range | -25 ~ +60 °C (Derating above 45 °C @ Rated output power) |
| Relative operating humidity | 0 %RH ~ 100 %RH |
| Operating altitude | 0 ~ 4,000 m (Derating above 2,000 m) |
| Cooling | Natural convection |
| Display | LED indicators; integrated WLAN + FusionSolar APP |
| Communication | RS485, WLAN via inverter built-in WLAN module Ethernet via Smart Dongle-WLAN-FE (Optional); 4G / 3G / 2G via Smart Dongle-4G (Optional) |
| Weight (incl. mounting bracket) | 12.0 kg (26.5 lb) |
| Dimension (incl. mounting bracket) | 365mm * 365mm * 156 mm (14.4 x 14.4 x 6.1 inch) |
| Degree of protection | IP65 |
| Nighttime power consumption | < 2.5 W |

Optimizer Compatibility

| | |
|------------------------------|---|
| DC MBUS compatible optimizer | SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P |
|------------------------------|---|

Standard Compliance (more available upon request)

| | |
|---------------------------|--|
| Safety | EN/IEC 62109-1, EN/IEC 62109-2 |
| Grid connection standards | G98, G99, EN 50549-1, CEI 0-21, VDE-AR-N-4105, AS 4777.2, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, IEC61727, IEC62116 |

¹ Inverter max input PV power is 10,000Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.
² The maximum input voltage and operating voltage upper limit will be reduced to 495 V when inverter connects and works with LG battery.
³ 2,500 W @ 5kWh HUAWEI ESS battery

SUN2000-3-10KTL-M1 (High Current Version) Smart Energy Controller



Active Safety

AI Powered
Active Arcing Protection



Higher Yields

Up to 30% More Energy
with Optimizer ¹





Battery Ready

Plug & Play battery interface ²



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

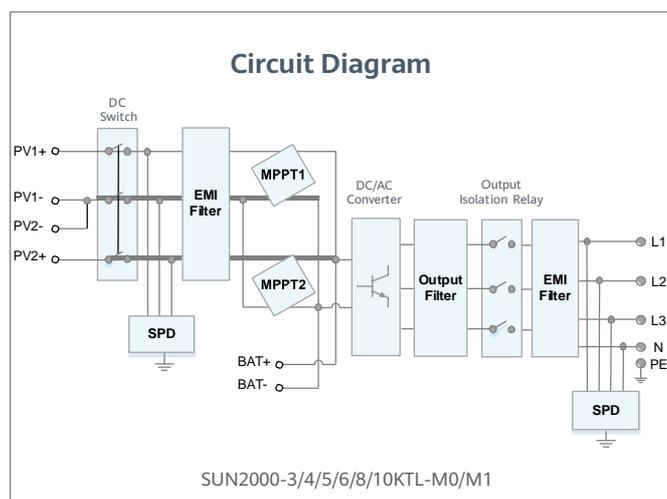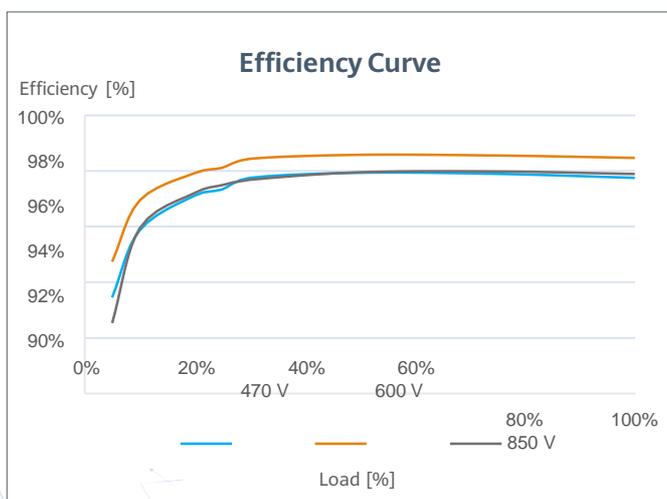

¹ Only applicable to SUN2000-3/4/5/6/8/10KTL-M1 smart energy center.
² SUN2000-3/4/5/6/8/10KTL-M0 will be compatible with HUAWEI smart string ESS in Q1, 2021

Technical Specification

| Technical Specification | SUN2000 -3KTL-M1 | SUN2000 -4KTL-M1 | SUN2000 -5KTL-M1 | SUN2000 -6KTL-M1 | SUN2000 -8KTL-M1 | SUN2000 -10KTL-M1 |
|-------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|
|-------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|

Efficiency

| | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|-------|
| Max. efficiency | 98.2% | 98.3% | 98.4% | 98.6% | 98.6% | 98.6% |
| European weighted efficiency | 96.7% | 97.1% | 97.5% | 97.7% | 98.0% | 98.1% |

Input (PV)

| | | | | | | |
|--|---------------|----------|----------|----------|-----------|-----------|
| Recommended max. PV power ¹ | 4,500 Wp | 6,000 Wp | 7,500 Wp | 9,000 Wp | 12,000 Wp | 15,000 Wp |
| Max. input voltage ² | 1,100 V | | | | | |
| Operating voltage range ³ | 140 V ~ 980 V | | | | | |
| Start-up voltage | 200 V | | | | | |
| Rated input voltage | 600 V | | | | | |
| Max. input current per MPPT | 13.5 A | | | | | |
| Max. short-circuit current | 19.5 A | | | | | |
| Number of MPP trackers | 2 | | | | | |
| Max. input number per MPP tracker | 1 | | | | | |

Input (DC Battery)

| | | | | | | |
|-------------------------|--------------------------------------|---------|---------|---------|---------|----------|
| Compatible Battery | HUAWEI Smart String ESS 5kWh – 30kWh | | | | | |
| Operating voltage range | 600 V ~ 980 V | | | | | |
| Max operating current | 16.7 A | | | | | |
| Max charge Power | 10,000 W | | | | | |
| Max discharge Power | 3,300 W | 4,400 W | 5,500 W | 6,600 W | 8,800 W | 10,000 W |

Output (On Grid)

| | | | | | | |
|--------------------------------|---|----------|----------|----------|----------|------------------------|
| Grid connection | Three-phase | | | | | |
| Rated output power | 3,000 W | 4,000 W | 5,000 W | 6,000 W | 8,000 W | 10,000 W |
| Max. apparent power | 3,300 VA | 4,400 VA | 5,500 VA | 6,600 VA | 8,800 VA | 11,000 VA ⁴ |
| Rated output voltage | 220 Vac / 380 Vac, 230 Vac / 400 Vac, 3W / N+PE | | | | | |
| Rated AC grid frequency | 50 Hz / 60 Hz | | | | | |
| Max. output current | 5.1 A | 6.8 A | 8.5 A | 10.1 A | 13.5 A | 16.9 A |
| Adjustable power factor | 0.8 leading ... 0.8 lagging | | | | | |
| Max. total harmonic distortion | ≤ 3% | | | | | |

Output (Off Grid)

| | | | | | | |
|------------------------|-----------------------------|----------|----------|----------|----------|----------|
| Backup Box | Backup Box – B1 | | | | | |
| Maximum apparent power | 3,000 VA | 3,300 VA | 3,300 VA | 3,300 VA | 3,300 VA | 3,300 VA |
| Rated output voltage | 220 V / 230 V | | | | | |
| Maximum output current | 13.6 A | 15 A | 15 A | 15 A | 15 A | 15 A |
| Power factor range | 0.8 leading ... 0.8 lagging | | | | | |

Features & Protections

| | |
|--------------------------------------|--|
| Input-side disconnection device | Yes |
| Anti-Islanding protection | Yes |
| DC reverse polarity protection | Yes |
| Insulation monitoring | Yes |
| DC surge protection | Yes, compatible with TYPE II protection class according to EN/IEC 61643-11 |
| AC surge protection | Yes, compatible with TYPE II protection class according to EN/IEC 61643-11 |
| Residual current monitoring | Yes |
| AC overcurrent protection | Yes |
| AC short-circuit protection | Yes |
| AC overvoltage protection | Yes |
| Arc fault protection | Yes |
| Ripple receiver control | Yes |
| Integrated PID recovery ⁵ | Yes |
| Battery reverse charging from grid | Yes |

General Data

| | |
|------------------------------------|--|
| Operating temperature range | -25 ~ +60 °C (-13 °F ~ 140 °F) |
| Relative operating humidity | 0 %RH ~ 100 %RH |
| Max. operating altitude | 4,000 m (13,123 ft.) (Derating above 2000 m) |
| Cooling | Natural convection |
| Display | LED Indicators; Integrated WLAN + FusionSolar App |
| Communication | RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE; 4G / 3G / 2G via Smart Dongle-4G (Optional) |
| Weight (incl. mounting bracket) | 17 kg (37.5 lb) |
| Dimension (incl. mounting bracket) | 525 x 470 x 146.5 mm (20.7 x 18.5 x 5.8 inch) |
| Degree of protection | IP65 |
| Nighttime Power Consumption | < 5.5 W ⁶ |

Optimizer Compatibility

| | |
|------------------------------|---|
| DC MBUS compatible optimizer | SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P |
|------------------------------|---|

Standard Compliance (more available upon request)

| | |
|---------------------------|---|
| Certificate | EN/IEC 62109-1, EN/IEC 62109-2, IEC 62116 |
| Grid connection standards | G98, G99, EN 50438, CEI 0-21, VDE-AR-N-4105, AS 4777, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, NRS 097-2-1, IEC61727, IEC62116, DEWA |

¹ Inverter max input PV power is 20,000 Wp when long strings are designed and fully connected with SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P power optimizers.

² The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

³ Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

⁴ C10 / 11: 10,000 VA

⁵ SUN2000-3-10KTL-M1 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly).

⁶ <10 W when PID recovery function is activated. SOLAR.HUAWEI.COM/MEA

Smart String Energy Storage System



More Usable Energy

100% Depth of Discharge
Pack Level Energy Optimization



Flexible Investment

5kWh Modular Design,
Scalable from 5 to 30 kWh



Safe & Reliable

LFP Cell
4-layer Safety Protection



Easy Installation

12 kg Power Module
50 kg Battery Module




Quick Commissioning

Automatically Detected in App




Perfect Compatibility

Compatible to Both Residential
Single & Three Phase Inverter



LUNA2000-5/10/15-S0 Technical Specification

| Technical Specification | LUNA2000-5-S0 | LUNA2000-10-S0 | LUNA2000-15-S0 |
|-------------------------|---|--|---|
| |  |  |  |

Performance

| | | | |
|---|-----------------|-----------|-----------|
| Power module | LUNA2000-5KW-C0 | | |
| Number of power modules | 1 | | |
| Battery module | LUNA2000-5-E0 | | |
| Battery module energy | 5 kWh | | |
| Number of battery Modules | 1 | 2 | 3 |
| Battery usable energy ¹ | 5 kWh | 10 kWh | 15 kWh |
| Max. output power | 2.5 kW | 5 kW | 5 kW |
| Peak output power | 3.5 kW, 10s | 7 kW, 10s | 7 kW, 10s |
| Nominal voltage (single phase system) | 450 V | | |
| Operating voltage range (single phase system) | 350 – 560V | | |
| Nominal voltage (three phase system) | 600 V | | |
| Operating voltage range (three phase system) | 600 – 980V | | |

Communication

| | |
|---------------|---|
| Display | SOC status indicator, LED indicator |
| Communication | RS485 / CAN (only for parallel operation) |

General Specification

| | | | |
|---------------------------------------|---|--|---|
| Dimension (W*D*H) | 670 * 150 * 600 mm (26.4 * 5.9 * 23.6 inch) | 670 * 150 * 960 mm (26.4 * 5.9 * 37.8 inch) | 670 * 150 * 1320 mm (26.4 * 5.9 * 60.0 inch) |
| Weight (Floor stand toolkit included) | 63.8 kg (140.7lb) | 113.8 kg (250.9lb) | 163.8 kg (361.1lb) |
| Power module dimension (W*D*H) | 670 * 150 * 240 mm (26.4 * 5.9 * 9.4 inch) | | |
| Power module weight | 12 kg (26.5 lb) | | |
| Battery module dimension (W*D*H) | 670 * 150 * 360 mm (26.4 * 5.9 * 14.0 inch) | | |
| Battery module weight | 50 kg (110.2 lb) ² | | |
| Installation | Floor stand (standard), Wall mount (optional) | | |
| Operating temperature | -20°C ~ + 55°C (-4°F ~ 131°F) ³ | | |
| Max. operating altitude | 4,000 m (13,123 ft.) (Derating above 2,000 m) | | |
| Environment | Outdoor ⁴ (*Please refer to the user manual for installation condition) | | |
| Relative humidity | 5% ~ 95% | | |
| Cooling | Natural convection | | |
| Protection rating | IP 66 | | |
| Noise emission | <29 dB | | |
| Cell technology | Lithium-iron phosphate (LiFePO4) | | |
| Scalability | Max. 2 systems in parallel operation | | |
| Compatible inverters | SUN2000-2/3/3.68/4/4.6/5/6KTL-L1, SUN2000-3/4/5/6/8/10KTL-M0 ⁵ , SUN2000-3/4/5/6/8/10KTL-M1 | | |

Standard Compliance (more available upon request)

| | |
|--------------|---|
| Certificates | CE, RCM, CEC, VDE2510-50, IEC62619, IEC 60730, UN38.3 |
|--------------|---|

Ordering and Deliverable Part

| | |
|-------------------------------------|--|
| Product ordering model ⁶ | LUNA2000-5KW-C0, LUNA2000-5-E0, LUNA2000 Wall Mounting Bracket |
|-------------------------------------|--|

1. Test conditions: 100% depth of discharge (DoD), 0.2C rate charge & discharge at 25°C, at the beginning of life. If no PV modules are installed or the system has not detected sunlight for at least 24 hours, the minimum end of discharge SOC is 15%.

2. The weight of the battery module is subject to the actual product, with a tolerance of ±3%

3. Refer to battery warranty letter for conditional application.

4. Improper storage system installation may compromise product warranty and operation safety. Please follow the user manual during the installation, use, and maintenance of the storage system.

5. Please contact local engineer for the compatibility between the SUN2000-3/4/5/6/8/10KTL-M0 with the LUNA2000.

6. Storage system is ordered and delivered in the form of power module and battery module separately with corresponding quantity.

Smart PV Optimizer



One-Fits-All Optimizer
Easier Business



<5s Module Auto-Mapping



Arc Fault Pinpoint
Positioning Along PV Cable

| Technical Specification | SUN2000-450W-P2 | SUN2000-600W-P | | |
|--|--|--------------------|--|---------------------|
| Input | | | | |
| Rated Input DC Power ¹ | 450 W | 600 W | | |
| Absolute maximum input voltage | 80 V | | | |
| MPPT operating voltage range | 10 - 80 V | | | |
| Maximum Short Circuit Current (Isc) | 14.5 A | | | |
| Max. efficiency | 99.5 % | | | |
| Weighted efficiency | 99.0 % | | | |
| Overvoltage category | II | | | |
| Output | | | | |
| Max. output voltage | 80 V | | | |
| Max. output current | 15 A | | | |
| Output bypass ² | Yes | | | |
| Shutdown output voltage per optimizer ³ | 0 V | | | |
| Shutdown output impedance per optimizer | 1k ohm ± 10 % | | | |
| Communication | | | | |
| Communication Method | MBUS | | | |
| Standard Compliance | | | | |
| Safety | IEC62109-1 (class II safety) | | | |
| RoHS | Yes | | | |
| General Data | | | | |
| Dimension (W x H x D) | 75 x 140 x 28 mm (3.0 x 5.5 x 1.1 inch) | | | |
| Weight (including cables) | 0.6 kg (1.3 lb.) | | | |
| Installation part (optional) | Frame Mounting Bracket / T-shaped Bolt ⁴ | | | |
| Input connector | MC4 | | | |
| Input wire length | 0.15m (0.49 ft.) | | | |
| Output connector | MC4 | | | |
| Output wire length | 1.3 m (4.3 ft.) ⁵ | | | |
| Operating temperature / humidity range | -40 °C ~ 85 °C ⁵ / 0 %RH ~ 100 %RH | | | |
| Degree of protection | IP68 | | | |
| Compatible product | SUN2000-2/3/3.68/4/4.6/5/6KTL-L1, SUN2000-3/4/5/6/8/10KTL-M1, SUN2000-12/15/17/20KTL-M2, SUN2000-12/15/17/20/25KTL-M5, SUN2000-30/36/40KTL-M3 | | | |
| Long String Design (Full Optimizer) | SUN2000-2-6KTL-L1 | SUN2000-3-10KTL-M1 | SUN2000-12-20KTL-M2 SUN2000-12-25KTL-M5 | SUN2000-30-40KTL-M3 |
| Minimum optimizer number per string ⁶ | 4 | 6 | 6 | 6 |
| Maximum optimizer number per string | 25 | 35 | 35 | 25 |
| Maximum DC power per string | 6,000 W | 10,000 W | 12,000 W | 12,000 W |

^{*1} In the STC environment, The rated power of the module shall not exceed 1.05 times of the optimizer rated input power.

^{*2} Power optimizer is bypassed in the string connected to an operating inverter when it fails to work

^{*3} Power optimizer output 0Vdc when disconnecting to the inverter or inverter is shutdown.

^{*4} Allow PV module frame installation / extruded aluminum profile installation

^{*5} Fits PV module in landscape and portrait installation.

^{*6} Require standard 60 cells module to meet the inverter minimum startup voltage

^{*7} Full power capability refers to online smart design tool.



Single Phase

7.4

 kW/32 A

SCharger-7KS-S0

Three Phase

22

 kW/32 A

SCharger-22KT-S0



PV Power Preferred ¹

Power Your Car with Solar
Make EV Even Greener



Automatic Phase Switch ²

Automatic Switch between 1 Phase and 3 Phase
More Usable Green Power



3 Ways Authentication

Bluetooth, RFID and APP
Avoid Accidental Charging



Dynamic Charging Power

Automatic Detection and Adjustment
No Worry about Overload



All on a Single APP

Full Control Through One APP
for All PV + ESS + Charger



3-Step Installation

Fast Installation in 16 Minutes
Wiring-free Maintenance



Smart Charger

Technical Specifications

| Technical Specification | SCharger-7KS-S0 | SCharger-22KT-S0 |
|---|---|--|
| Inputs and Outputs | | |
| Charge power (configurable) | 1.4 kW to 7.4 kW | 1.4 kW ³ to 22 kW |
| Nominal voltage | 230 V (1-phase) ± 20% | 400 V (3-phase) ± 20% |
| Nominal current (configurable) | 6–32 A (1-phase) | 6–32 A (3-phase or 1-phase) |
| Nominal frequency | 50 Hz/60 Hz ± 1 Hz | |
| Vehicle connection | Type 2 socket | |
| Cable width | Up to 10 mm ² | |
| Network types | TN, TT, IT | TN, TT |
| User Interface & Communications | | |
| Protocol | Modbus TCP | |
| Communication | Wi-Fi/Ethernet | |
| Charger status information | WRGB LED, App | |
| Authentication | RFID (ISO-14443-A), App, Bluetooth | |
| Remote control & monitoring | App | |
| Working mode | Normal Charge Scheduled Charge PV Power Preferred | |
| Protection | | |
| Cable protection | Cable E-Lock via App | |
| Residual current protection (RCD) | Type A(30mA) + DC 6 mA integrated (IEC 62955 & IEC 61008-1) | |
| Fire Class | UL94 | |
| Overcurrent protection | IEC 61851-1 | |
| Over-temperature protection | Yes | |
| Surge protection | CAT II | |
| General Specifications | | |
| Operating temperature range | -35°C to +45°C | -35°C to +40°C @ 32A -35°C to +50°C @ 16A |
| Application environment | Outdoor/Indoor | |
| Storage temperature | -40°C to +70°C | |
| Relative humidity | 5% RH–95% RH | |
| Altitude | ≤ 2000 m (derating between 2000~4000m) | |
| Dimensions (H x W x D) | 335 mm x 180 mm x 145 mm | |
| Weight | 3 kg | 3.1 kg |
| Installation mode | Wall-mounted | |
| IP rating | IP54 | |
| Impact protection level | IK10 | |
| Standby self-consumption | < 6 W | |
| Standards Compliance (More Available Upon Request) | | |
| Standard | EN 61851-1 2019, IEC 62955:2018, IEC 61008-1 2010, IEC/EN 62196-1 | |
| Others | | |
| Accessories | RFID Card * 2 | |

*1 Currently available for free trial and will be notified 30 days in advance, when the function enters the charging phase

*2 Available in PV Power Preferred Mode

*3 1.4 kW for 1-Phase charge and 4.2 kW for 3-Phase charge

Backup Box



Simple

Automatic detection & switchover



Reliable

Provide Reliable backup power



Solar Reloading


Battery reloading from sun in backup mode



Black start

Restart the system after battery shutdown

| Technical Specification | Backup Box-B0 | Backup Box-B1 |
|------------------------------|---|----------------------------|
| AC Output (On grid) | | |
| Grid connection | Single Phase | Three Phase |
| Rated voltage | 220 V / 230 V | 380 V / 400 V |
| AC frequency | 50Hz / 60Hz | |
| AC output voltage range | 198 V ~ 253 V | 342 V ~ 440 V |
| AC Output (Backup) | | |
| Load connection | Single Phase | Single Phase |
| Rated voltage | 220 V / 230 V | 220 V / 230 V |
| AC frequency | 50Hz / 60Hz | |
| Maximum apparent power | 5,000 VA | 3,300 VA |
| Maximum output current | 22.7 A | 15.2 A |
| Switchover time | < 3 s | |
| AC Input (Inverter) | | |
| Rated voltage | 220 V / 230 V | 380 V / 400 V |
| AC frequency | 50Hz / 60Hz | |
| Compatible inverter | SUN2000-2/3/3.68/4/4.6/5/6KTL-L1 | SUN2000-3/4/5/6/8/10KTL-M1 |
| General Specification | | |
| Operating temperature range | -20 °C to +45 °C (-4 °F to 113 °F) | |
| Relative humidity range | 0 %RH ~ 100 %RH | |
| Dimensions (W * H * D) | 400 x 350 x 130 mm (15.8 x 13.8 x 5.1 inch) | |
| Weight | 11 kg | |
| Degree of protection | IP 65 | |



Smart Dongle-WLAN-FE



Smart

WLAN & Fast Ethernet (FE) communication
Support 3rd-party monitoring system ¹



Simple

Plug & Play
Support max. 10 devices



Reliable

IP65
Support auto reconnection

| Technical Specification | SDongleA-05(AP+STA) |
|--|--|
| General Data | |
| Max. Devices Supported | 10 |
| Max. Inverters Supported | 10 |
| Connection interface | USB |
| Ethernet Interface | 10/100M Ethernet |
| Installation | Plug-and-play |
| Indicator | LED Indicator |
| Dimensions (W * H * D) | 146 x 48 x 33 mm (5.1 x 1.9 x 1.3 inch) |
| Weight | 90 g (0.2 lb.) |
| Degree of protection | IP65 |
| Power consumption (typical) | 2.5 W |
| Operation Mode | AP + STA |
| Encryption Algorithm | Encryption Mechanism: WPA/WPA2 Encryption: TKIP/CCMP/AES |
| Wireless Parameter | |
| Supported standards & frequencies | 802.11b/g/n (2.412G—2.484G) |
| Environment | |
| Operating temperature range | -30 °C to +65 °C (-22 °F to 149 °F) |
| Relative humidity range | 5 - 95% RH |
| Storage temperature range | -40 °C to +70 °C (-40 °F to 158 °F) |
| Max. operating altitude | 4,000 m (13,123 ft.) |
| Standard Compliance (more available upon request) | |
| Certificate | SRRC, CE, RCM |
| Inverter Compatibility | |
| Inverter Model | SUN2000-2/3/3.68/4/4.6/5/6-L1 SUN2000-3/4/5/6/8/10-M1 SUN2000-12/15/17/20KTL-M2 SUN2000-12/15/17/20/25KTL-M5 SUN2000-30/36/40/50KTL-M3 SUN2000-100/115KTL-M2 SUN2000-110KTL-INM2 |

¹: 3rd-party management system shall match the communication protocol with Huawei Smart Dongle.

Smart Dongle-4G



Smart

4G communication ¹

Support 3rd-party monitoring system ²



Simple

Plug & Play

WLAN-AP for local deploying ³



Reliable

IP65

Support auto reconnection

| Technical Specification | SDongleB-06-EU | SDongleB-06-AU | SDongleB-06-NH |
|-------------------------|----------------|----------------|----------------|
|-------------------------|----------------|----------------|----------------|

| General Data | |
|-----------------------------|---------------|
| Max. Devices Supported | 10 |
| Max. Inverters Supported | 10 |
| Connection interface | USB |
| Installation | Plug-and-play |
| Indicator | LED Indicator |
| Dimensions (W * H * D) | 162*48*28mm |
| Degree of protection | IP65 |
| Power consumption (typical) | 3.5W |

| Wireless Parameter | | | |
|--|---|--|--|
| Sim card type | mini-sim (15 mm*25 mm) | | |
| Supported standards & frequencies ⁴ | LTE-FDD: B1/B3/B7/B8/B20/B28 LTE-TDD: B38/B40/B41 GSM: 850/900/1800/1900MHz | LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE-TDD: B40 WCDMA: B1/B2/B5/B8 GSM: 850/900/1800/1900MHz | LTE-FDD: B1/B3/B8/B18/B19/B26 LTE-TDD: B41 WCDMA: B1/B6/B8/B19 |
| Wifi Operation Mode | AP | | |
| Supported standards & frequencies | 802.11b/g/n (2.412G—2.484G) | | |

| Environment | |
|-----------------------------|-------------------------------------|
| Operating temperature range | -30 °C to +65 °C (-22 °F to 149 °F) |
| Relative humidity range | 5 - 95% RH |
| Storage temperature range | -40 °C to +70 °C (-40 °F to 158 °F) |
| Max. operating altitude | 4,000 m (13, 123 ft.) |

| Standard Compliance (more available upon request) | | | |
|---|----|-----|-------|
| Certificate | CE | RCM | TELEC |

| Inverter Compatibility | |
|------------------------|---|
| Inverter model | SUN600-5/6KTL-L0 SUN2000-2~6KTL-L1 SUN2000-3~10KTL-M1 SUN2000-8~20KTL-M2 SUN2000-12~25KTL-M5 SUN2000-20~50KTL-M3 SUN2000-50/60KTL-M0 SUN2000-50KTL-JPM1 SUN2000-63KTL-JPM0 SUN2000-75KTL-M1 SUN2000-100KTL-M0/M1 SUN2000-100KTL-INM0 SUN2000-110KTL-INM2 SUN2000-100/115KTL-M2 |

1: To ensure stable data transmission, Huawei suggests 4G dongle to be installed in areas with stable mobile signal (2G signal ≥4 bars, 3G/4G signal ≥3 bars).

2: 3rd-party management system shall match the communication protocol with Huawei Smart Dongle.

3: When all inverters support WLAN hotspot, hotspot of Dongle will be disabled by default.

4: For recommended carriers list and details on supported frequencies, please contact local distributors.

Smart Power Sensor



Accurate

Class 1 measurement accuracy



Simple & Easy

LCD display, easy to set and check



Energy Efficient

Overall power consumption ≤ 1 W

| Technical Specification | DDSU666-H | DTSU666-H | DTSU666-H 250A/50mA |
|-------------------------------|--|--|--|
| General Data | | | |
| Dimension (H x W x D) | 100 x 36 x 65.5 mm (3.9 x 1.4 x 2.6 inch) | 100 x 72 x 65.5 mm (3.9 x 2.8 x 2.6 inch) | 100 x 72 x 65.5 mm (3.9 x 2.8 x 2.6 inch) |
| Mounting type | DIN35 Rail | | |
| Weight (including cables) | 1.2 kg (2.6 lb) | 1.5 kg (3.3 lb) | 1.5 kg (3.3 lb) |
| Power Supply | | | |
| Power grid type | 1P2W | 3P3W/3P4W | 3P3W/3P4W |
| Input voltage (phase voltage) | | 176 Vac ~ 288 Vac | |
| Power consumption | ≤ 0.8 W | ≤ 1 W | ≤ 1 W |
| Measurement Range | | | |
| Line voltage | / | 304 Vac ~ 499 Vac | 304 Vac ~ 499 Vac |
| Phase voltage | | 176 Vac ~ 288 Vac | |
| Current | 0 ~ 100 A | 0 ~ 100 A | 0 ~ 250 A |
| Measurement Accuracy | | | |
| Current / Voltage | ± 0.5 % | | |
| Power / Energy | ± 1 % | | |
| Frequency | ± 0.01 Hz | | |
| Communication | | | |
| Interface | RS485 | | |
| Baud rate | 9,600 bps | | |
| Communication protocol | Modbus-RTU | | |
| Environment | | | |
| Operating temperature range | -25 °C ~ 60 °C | | |
| Storage temperature range | -40 °C ~ 70 °C | | |
| Operating humidity | 5 %RH ~ 95 %RH (non-condensing) | | |
| Others | | | |
| Accessories | RS485 Cable (10 m / 33 ft.) | | |
| | 1 CT 100A / 40mA (5 m / 16.4 ft.) | 3 CT 100A / 40mA (5m / 16.4 ft.) | 3 CT 250A / 50mA (5m / 16.4 ft.) |
| | | | |

Smart Power Sensor



Accurate

Class 1 measurement accuracy



Simple & Easy

LCD display, easy to set and check



Energy Efficient

Overall power consumption ≤ 1.5 W

| Technical Specification | DTSU666-HW/YDS60-80 |
|------------------------------|--|
| General Data | |
| Dimension (H x W x D) | 100 x 72 x 80 mm (3.9 x 2.8 x 3.1 inch) |
| Mounting type | DIN35 Rail |
| Weight (including cables) | < 0.5 kg |
| Power Supply | |
| Power grid type | 3P4W/3P3W |
| Input voltage (line voltage) | 90 ~ 500 Vac |
| Power consumption | ≤ 1.5 W |
| Measurement Range | |
| Line voltage | 90 Vac ~ 1000 Vac (> 500 with external PT ¹) |
| Phase voltage | 52~577 Vac |
| Current | 0 ~ 80 A(>80 with external CTs ²) |
| Measurement Accuracy | |
| Voltage / Current | ± 0.5 % |
| Power / Energy | ± 1 % |
| Frequency | ± 0.01 Hz |
| Communication | |
| Interface | RS485 |
| Baud rate | 4800/9600/19200/115200 (Default 9600bps) |
| Communication protocol | Modbus-RTU |
| Environment | |
| Operating temperature range | -25 °C ~ 60 °C |
| Storage temperature range | -40 °C ~ 70 °C |
| Operating humidity | 5 %RH ~ 95 %RH (non-condensing) |
| Others | |
| Accessories | RS485 Cable (10 m / 33 ft.) |

*1 2nd voltage of CT should be 100V. And accuracy should be better than Class 0.5
 *2 2nd current of CT should be 1A or 5A. And accuracy should be better than Class 0.5

Smart Home Energy Management




Powerful Ecosystem
Expanding supported partners




AI Management
Higher Self-consumption Rate

Local Communication

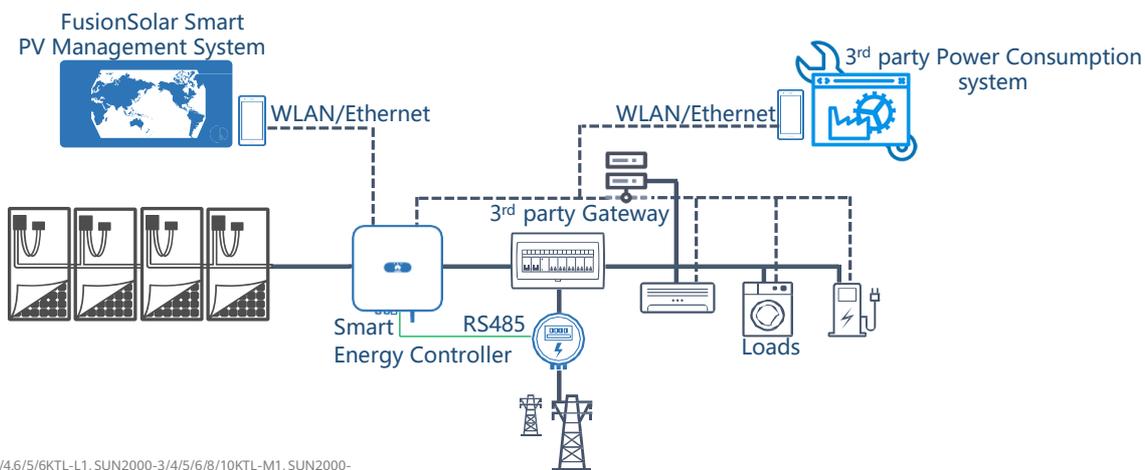

*1 Only SUN2000-2/3/3.68/4/4.6/5/6/KTL-L1, SUN2000-3/4/5/6/8/10/KTL-M1, SUN2000-12/15/17/20/KTL-M2 support Local Communication

Cloud Open API

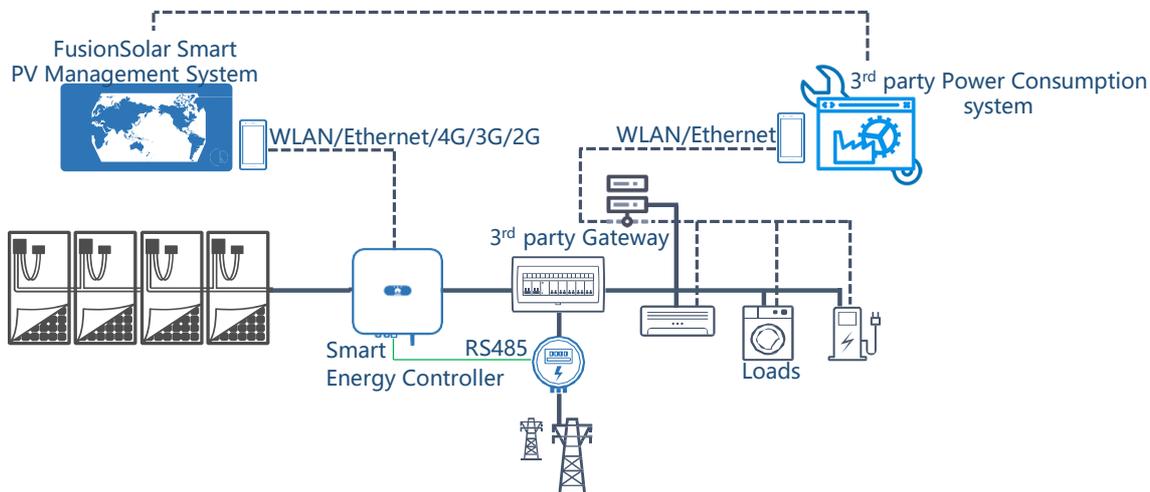


Smart Home Energy Management



| Mode | Supported Partners | | Homepage |
|---------------------|---|-----------------------|--|
| Local Communication |  | Solarmanager | www.solarmanager.ch |
| |  | my-PV | www.my-pv.com |
| |  | Smartfox | www.smartfox.at |
| |  | Elausys KNX Interface | www.elausys.be |
| |  | sonniQ | www.sonniq.de |
| |  | Solaranzeige | www.solaranzeige.de |
| |  | loxone | www.loxone.com/de |
| |  | Solar-Log | www.solar-log.com |
| Cloud Open API |  | clever-pv | www.clever.pv.com |
| |  | ev-autocharge | www.ev-autocharge.com |

Commercial Smart PV Solution

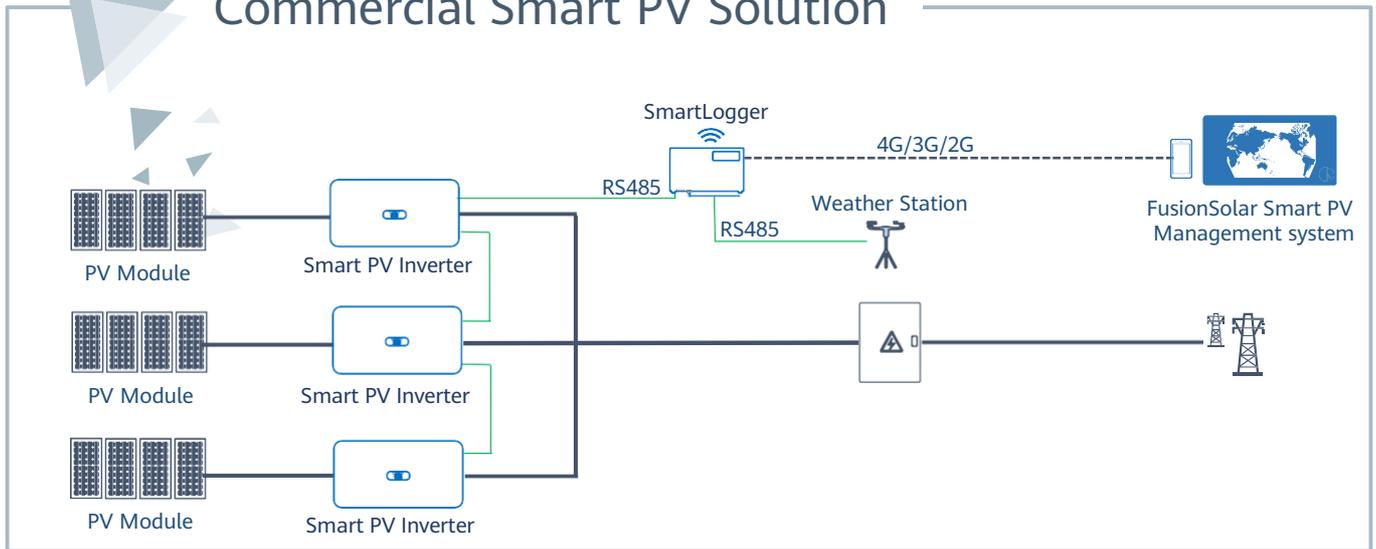

| Active Safety | Higher Yields | Maintenance Free |
|---|--|---|
| <p>AI Powered Active Arcing Protection</p> <p>C&I Tailored Enhanced Arcing Protection</p> | <p>2 Strings per MPPT, More Energy Yields</p> <p>Built-in PID Recovery, Secure Better Module Performance</p> | <p>No Fuse & Other Quick-wear Parts, Inverter Touch Free</p> <p>Online Smart I-V Curve Diagnosis, Module Touch Free</p> |



SUN2000-12/15/17/20KTL-M2 (High Current Version) Smart PV Controller



Active Safety

AI Powered Arcing Protection





Higher Yields

Up to 30% More Energy with Optimizer



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

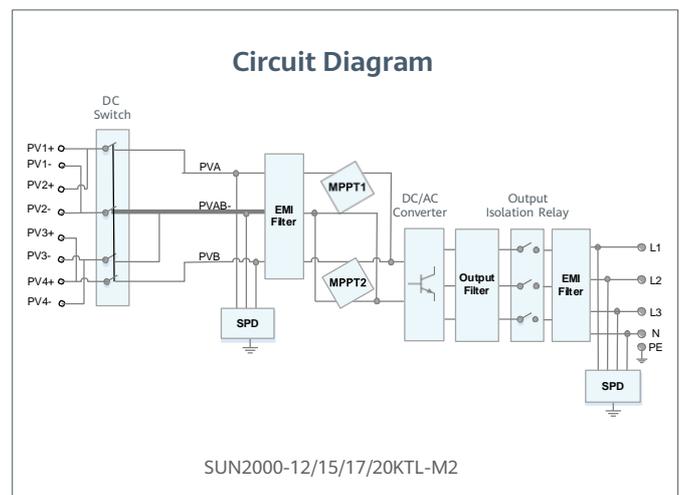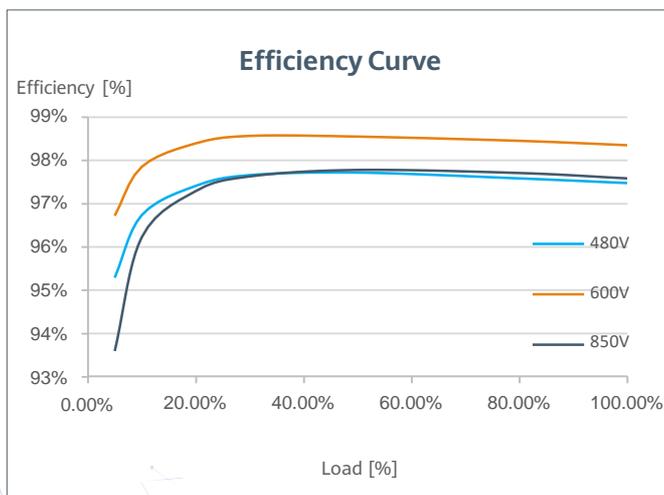

SUN2000-12/15/17/20KTL-M2 (High Current Version) Technical Specification

| Technical Specification | SUN2000 -12KTL-M2 | SUN2000 -15KTL-M2 | SUN2000 -17KTL-M2 | SUN2000 -20KTL-M2 |
|-------------------------|----------------------|----------------------|----------------------|----------------------|
|-------------------------|----------------------|----------------------|----------------------|----------------------|

Efficiency

| | | | | |
|------------------------------|--------|--------|--------|--------|
| Max. efficiency | 98.50% | 98.65% | 98.65% | 98.65% |
| European weighted efficiency | 98.00% | 98.30% | 98.30% | 98.30% |

Input

| | | | | |
|--|---|-----------|-----------|-----------|
| Recommended max. PV power ¹ | 18,000 Wp | 22,500 Wp | 25,500 Wp | 30,000 Wp |
| Max. input voltage ² | 1,080 V | | | |
| Operating voltage range ³ | 160 V ~ 950 V | | | |
| Start-up voltage | 200 V | | | |
| Rated input voltage | 600 V | | | |
| Max. input current per MPPT | 27 A (per MPPT) / 18 A (per Input) ⁴ | | | |
| Max. short-circuit current | 39 A | | | |
| Number of MPP trackers | 2 | | | |
| Max. number of inputs | 4 | | | |

Output

| | | | | |
|--------------------------------|---|-----------|-----------|-----------|
| Grid connection | Three phase | | | |
| Rated output power | 12,000 W | 15,000 W | 17,000 W | 20,000 W |
| Max. apparent power | 13,200 VA | 16,500 VA | 18,700 VA | 22,000 VA |
| Rated output voltage | 220 Vac / 380 Vac, 230 Vac / 400 Vac, 3W + N + PE | | | |
| Rated AC grid frequency | 50 Hz / 60 Hz | | | |
| Max. output current | 20 A | 25.2 A | 28.5 A | 33.5 A |
| Adjustable power factor | 0.8 leading ... 0.8 lagging | | | |
| Max. total harmonic distortion | ≤ 3 % | | | |

Features & Protections

| | |
|--------------------------------------|--|
| Input-side disconnection device | Yes |
| Anti-islanding protection | Yes |
| AC over-current protection | Yes |
| AC short-circuit protection | Yes |
| AC over-voltage protection | Yes |
| DC reverse-polarity protection | Yes |
| DC surge protection | TYPE II |
| AC surge protection | Yes, compatible with TYPE II protection class according to EN/IEC 61643-11 |
| Residual current monitoring unit | Yes |
| Arc fault protection | Yes |
| Ripple receiver control | Yes |
| Integrated PID recovery ⁵ | Yes |

General Data

| | |
|--|---|
| Operation temperature range | -25 ~ +60 °C (-13 °F ~ 140 °F) |
| Relative humidity | 0 % RH ~ 100% RH |
| Max. operating altitude | 0 ~ 4,000 m (13,123 ft.) (Derating above 2000 m) |
| Cooling | Natural Convection |
| Display | LED Indicators; Integrated WLAN + FusionSolar App |
| Communication | RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional) |
| Weight (with mounting plate) | 25 kg |
| Dimensions (W x H x D) (incl. mounting plate) | 525 x 470 x 262 mm (20.7 x 18.5 x 10.3 inch) |
| Degree of protection | IP65 |
| Nighttime Power Consumption | < 5.5W ⁶ |

Optimizer Compatibility

| | |
|------------------------------|---|
| DC MBUS compatible optimizer | SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P |
|------------------------------|---|

Standard Compliance (more available upon request)

| | |
|---------------------------|---|
| Safety | EN/IEC 62109-1, EN/IEC 62109-2 |
| Grid connection standards | G98, G99, EN 50549, CEI 0-21, CEI 0-16, VDE-AR-N-4105, VDE-AR-N-4110, AS 4777.2, C10/11, ABNT, VFR 2019, RD 1699, RD 661, PO 12.3, TOR D4, IEC61727, IEC62116, DEWA |

*1 Inverter max input PV power is 40,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

*2 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

*3 Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

*4 The MPPT voltage of each PV string must exceed the lower limit of Full Power MPPT Voltage Range. (Full Power MPPT Voltage Range: 12KTL@360~850V, 15KTL@380~850V, 17KTL@400~850V, 20KTL@450~850V)

*5 SUN2000-12~20KTL-M2 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly)

*6. <10W when PID recovery function is activated

*7. Smart IV Curve Diagnosis feature will be made available in a future firmware upgrade, which expected available 2021 Q4

SUN2000-12/15/17/20/25KTL-M5 Smart PV Controller



Active Safety

AI Powered Arcing Protection





Higher Yields

Up to 30% More Energy with Optimizer



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

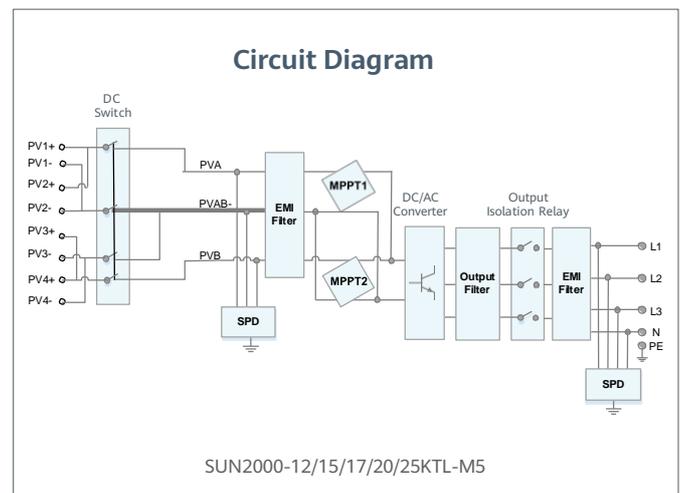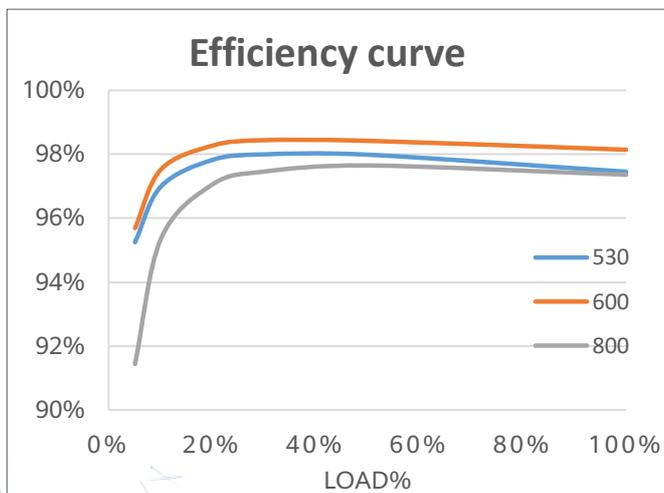

SUN2000-12/15/17/20/25KTL-M5 Technical Specification

| Technical Specification | SUN2000 -12KTL-M5 | SUN2000 -15KTL-M5 | SUN2000 -17KTL-M5 | SUN2000 -20KTL-M5 | SUN2000 -25KTL-M5 |
|-------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
|-------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|

Efficiency

| | | | | | |
|------------------------------|-------|-------|-------|-------|-------|
| Max. efficiency | 98.4% | 98.4% | 98.4% | 98.4% | 98.4% |
| European weighted efficiency | 97.9% | 98.0% | 98.1% | 98.1% | 98.2% |

Input

| | | | | | |
|---|--|-----------|-----------|-----------|-----------|
| Recommended max. PV power ¹ | 18,000 Wp | 22,500 Wp | 25,500 Wp | 30,000 Wp | 37,500 Wp |
| Max. input voltage ² | 1100 V | | | | |
| Full-load MPPT voltage range | 370V~800V | 410V~800V | 440V~800V | 480V~800V | 530~800V |
| MPPT Operating voltage range ³ | 200 V ~ 1000 V | | | | |
| Start-up voltage | 200 V | | | | |
| Rated input voltage | 600 V | | | | |
| Max. input current per MPPT | 30 A (two string) / 20 A (single string) | | | | |
| Max. short-circuit current | 40 A | | | | |
| Number of MPP trackers | 2 | | | | |
| Max. number of inputs | 4 | | | | |

Output

| | | | | | |
|--------------------------------|---|--|--|--|--|
| Grid connection | Three phase | | | | |
| Rated output power | 12,000 W | 15,000 W | 17,000 W | 20,000 W | 25,000 W |
| Max. apparent power | 13,200 W | 16,500 VA | 18,700 VA | 22,000 VA | 27,500 VA |
| Rated output voltage | 220 Vac / 380 Vac, 230 Vac / 400 Vac, 239.6 Vac / 415Vac, 3W + N + PE | | | | |
| Rated AC grid frequency | 50 Hz / 60 Hz | | | | |
| Max. output current | 18.2A/380Vac 17.3A/400Vac 16.7A/415Vac | 25.2A/380Vac 23.9A/400Vac 23.1A/415Vac | 28.6A/380Vac 27.1A/400Vac 26.1A/415Vac | 33.6A/380Vac 31.9A/400Vac 30.8A/415Vac | 42.0A/380Vac 39.9A/400Vac 38.5A/415Vac |
| Adjustable power factor | 0.8 leading ... 0.8 lagging | | | | |
| Max. total harmonic distortion | ≤ 3 % | | | | |

Features & Protections

| | |
|--------------------------------------|--------------|
| Overvoltage Category | PV II/AC III |
| Input-side disconnection device | Yes |
| Anti-islanding protection | Yes |
| AC over-current protection | Yes |
| DC reverse-polarity protection | Yes |
| String fault detection | Yes |
| DC surge protection | TYPE II |
| AC surge protection | CLASS II |
| Residual current monitoring unit | Yes |
| Arc fault protection | Yes |
| Ripple control | Yes |
| Integrated PID recovery ⁴ | Yes |

General Data

| | |
|--|---|
| Operation temperature range | -25 ~ + 60 °C (-13 °F ~ 140 °F) |
| Relative humidity | 0 % RH ~ 100% RH |
| Max. operating altitude | 0 ~ 4,000 m (13,123 ft.) (Derating above 2000 m) |
| Cooling | Smart air cooling |
| Display | LED Indicators; Integrated WLAN + FusionSolar App |
| Communication | RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional) |
| Weight (with mounting plate) | 21kg (46.4 lb) |
| Dimensions (W x H x D) (incl. mounting plate) | 546 x 460 x 228mm (21.5 x 18.1 x 9.0 inch) |
| Degree of protection | IP66 |

Optimizer Compatibility

| | |
|------------------------------|---|
| DC MBUS compatible optimizer | SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P, SUN2000-1300W-P, SUN2000-1100W-P |
|------------------------------|---|

Standard Compliance (more available upon request)

| | |
|---------------------------|---|
| Safety | EN/IEC 62109-1, EN/IEC 62109-2 |
| Grid connection standards | G99, EN 50549, CEI 0-21, CEI 0-16, VDE-AR-N-4105, VDE-AR-N-4110, C10/11, ABNT, VFR 2019, UNE 217001, UNE 217002, RD 244, TOR D4, IEC61727, IEC62116 |

^{*1} Inverter max input PV power is 40,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

^{*2} The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

^{*3} Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

^{*4} SUN2000-12~20KTL-M2 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly)

SUN2000-30/36/40KTL-M3 Smart PV Controller



Smart

8 strings intelligent monitoring



Efficient

Max. efficiency 98.7%





Safe

Fuse free design



Reliable

Type II surge arresters for DC & AC

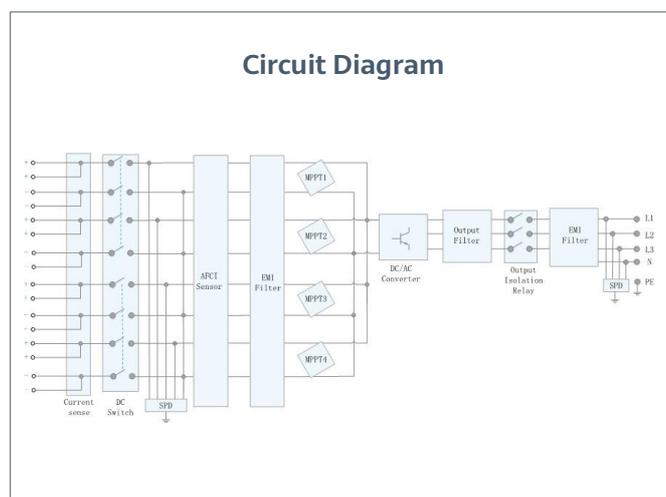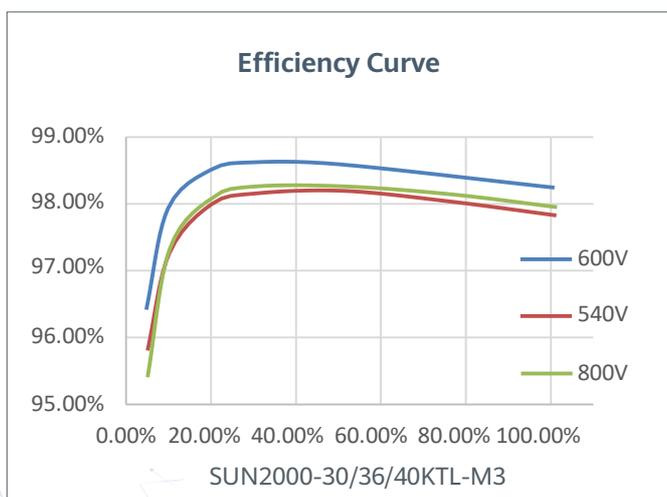

SUN2000-30/36/40KTL-M3
Technical Specification

| Technical Specification | SUN2000-30KTL-M3 | SUN2000-36KTL-M3 | SUN2000-40KTL-M3 |
|-------------------------|------------------|------------------|------------------|
|-------------------------|------------------|------------------|------------------|

Efficiency

| | | | |
|---------------------|-------|--|--|
| Max. Efficiency | 98.7% | | |
| European Efficiency | 98.4% | | |

Input

| | | | |
|---|------------------------------------|--|--|
| Max. Input Voltage ¹ | 1,100 V | | |
| Max. Current per MPPT | 27 A (per MPPT) / 20 A (per Input) | | |
| Max. Short Circuit Current per MPPT | 40 A | | |
| Start Voltage | 200 V | | |
| MPPT Operating Voltage Range ² | 200 V ~ 1000 V | | |
| Rated Input Voltage | 600 V | | |
| Number of Inputs | 8 | | |
| Number of MPP Trackers | 4 | | |

Output

| | | | |
|--------------------------------|--------------------------------------|-----------|-----------|
| Rated AC Active Power | 30,000 W | 36,000 W | 40,000 W |
| Max. AC Apparent Power | 33,000 VA ³ | 40,000 VA | 44,000 VA |
| Rated Output Voltage | 230 Vac / 400 Vac / 480 Vac, 3W/N+PE | | |
| Rated AC Grid Frequency | 50 Hz / 60 Hz | | |
| Rated Output Current | 43.3 A | 52.0 A | 57.8 A |
| Max. Output Current | 47.9 A | 58.0 A | 63.8 A |
| Adjustable Power Factor Range | 0.8 LG ... 0.8 LD | | |
| Max. Total Harmonic Distortion | < 3% | | |

Protection

| | | | |
|--------------------------------------|-----|--|--|
| Input-side Disconnection Device | Yes | | |
| Anti-islanding Protection | Yes | | |
| AC Overcurrent Protection | Yes | | |
| DC Reverse-polarity Protection | Yes | | |
| PV-array String Fault Monitoring | Yes | | |
| DC Surge Arrester | Yes | | |
| AC Surge Arrester | Yes | | |
| DC Insulation Resistance Detection | Yes | | |
| Residual Current Monitoring Unit | Yes | | |
| Arc Fault Protection | Yes | | |
| Ripple Receiver Control | Yes | | |
| Integrated PID Recovery ⁴ | Yes | | |

Communication

| | | | |
|--------------|--|--|--|
| Display | LED Indicators, Integrated WLAN + FusionSolar APP | | |
| RS485 | Yes | | |
| Smart Dongle | WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional) | | |

General Data

| | | | |
|------------------------------|--|--|--|
| Dimensions (W x H x D) | 640 x 530 x 270 mm (25.2 x 20.9 x 10.6 inch) | | |
| Weight (with mounting plate) | 43 kg (94.8 lb) | | |
| Operating Temperature Range | -25 ~ + 60 °C (-13 °F ~ 140 °F) | | |
| Cooling Method | Natural Convection | | |
| Max. Operating Altitude | 4,000 m (13,123 ft.) (Derating above 2000 m) | | |
| Relative Humidity | 0% RH ~ 100% RH | | |
| DC Connector | Amphenol Helios H4 | | |
| AC Connector | Waterproof Connector + OT/DT Terminal | | |
| Protection Degree | IP 66 | | |
| Topology | Transformerless | | |
| Nighttime Power Consumption | ≤ 5.5W | | |

Optimizer Compatibility

| | | | |
|------------------------------|---|--|--|
| DC MBUS Compatible Optimizer | SUN2000-450W-P, SUN2000-450W-P2, SUN2000-600W-P | | |
|------------------------------|---|--|--|

Standard Compliance (more available upon request)

| | | | |
|---------------------------|---|--|--|
| Safety | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683 | | |
| Grid Connection Standards | IEC 61727, VDE-AR-N4105, VDE 0126-1-1, BDEW, G59/3, UTE C 15-712-1, CEI 0-16, CEI 0-21, RD 661, RD 1699, P.O. 12.3, RD 413, EN-50438-Turkey, EN-50438-Ireland, C10/11, MEA, Resolution No.7, NRS 097-2-1, AS/NZS 4777.2, DEWA | | |

1. The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
2. Any DC input voltage beyond the operating voltage range may result in inverter improper operating.
3. For Austria, German & Ukraine the Max. AC Apparent Power will not exceed 30,000 VA (with regard to grid code: VDE-AR-N-4105 & Austria)
4. SUN2000-30~40KTL-M3 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly)

SUN2000-50KTL-M3 Smart PV Controller



Higher Yields

Up to 30% More Energy
with Optimizer





Active Safety

AI Powered
Active Arcing Protection



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

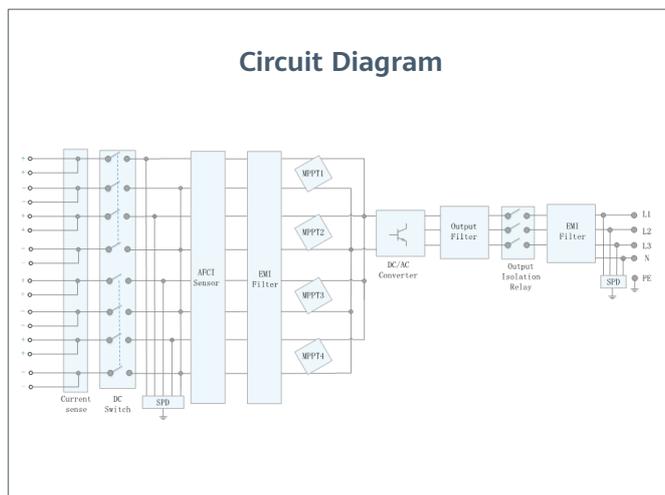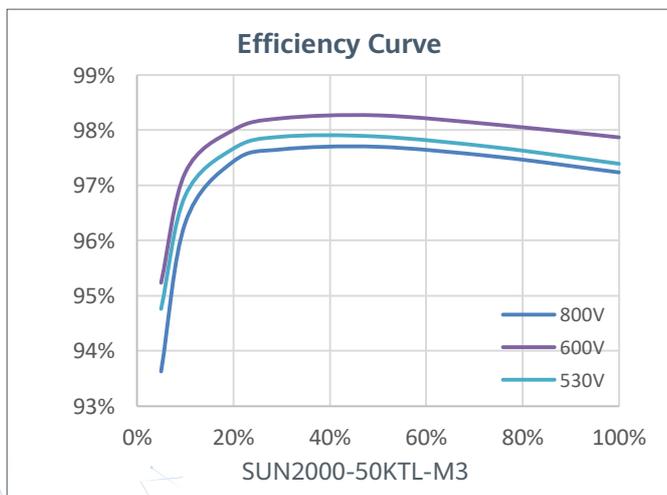

| | |
|--------------------------------|-------------------------|
| Technical Specification | SUN2000-50KTL-M3 |
|--------------------------------|-------------------------|

| Efficiency | |
|---------------------|-------|
| Max. Efficiency | 98.5% |
| European Efficiency | 98.0% |

| Input | |
|---|------------------------------------|
| Max. Input Voltage ¹ | 1,100 V |
| Max. Current per MPPT | 30 A (per MPPT) / 20 A (per Input) |
| Max. Short Circuit Current per MPPT | 40 A |
| Start Voltage | 200 V |
| MPPT Operating Voltage Range ² | 200 V ~ 1,000 V |
| Rated Input Voltage | 600 V |
| Number of Inputs | 8 |
| Number of MPP Trackers | 4 |

| Output | |
|--------------------------------|----------------------------------|
| Rated AC Active Power | 50,000 W |
| Max. AC Apparent Power | 55,000 VA |
| Max. AC Active Power (cosφ=1) | 55,000 W |
| Rated Output Voltage | 400 Vac / 480 Vac, 3W+(N) + PE |
| Rated AC Grid Frequency | 50 Hz / 60 Hz |
| Rated Output Current | 72.2 A @ 400Vac, 60.1 A @ 480Vac |
| Max. Output Current | 79.8 A @ 400Vac, 66.5 A @ 480Vac |
| Adjustable Power Factor Range | 0.8 LG ... 0.8 LD |
| Max. Total Harmonic Distortion | <3% |

| Protection | |
|--------------------------------------|---------|
| Input-side Disconnection Device | Yes |
| Anti-islanding Protection | Yes |
| AC Overcurrent Protection | Yes |
| DC Reverse-polarity Protection | Yes |
| PV-array String Fault Monitoring | Yes |
| DC Surge Arrester | Type II |
| AC Surge Arrester | Type II |
| DC Insulation Resistance Detection | Yes |
| Residual Current Monitoring Unit | Yes |
| Arc Fault Protection | Yes |
| Ripple Receiver Control | Yes |
| Integrated PID Recovery ³ | Yes |

| Communication | |
|-----------------------|--|
| Display | LED Indicators, Bluetooth + APP |
| RS485 | Yes |
| Smart Dongle | WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional) |
| Monitoring BUS (MBUS) | Yes (Isolation Transformer required) |

| General Data | |
|------------------------------|--|
| Dimensions (W x H x D) | 640 x 530 x 270 mm (25.2 x 20.9 x 10.6 inch) |
| Weight (with mounting plate) | 49 kg (108.1 lb) |
| Operating Temperature Range | -25°C ~ 60°C (-13°F ~ 140°F) |
| Cooling Method | Smart Air Cooling |
| Max. Operating Altitude | 4,000 m (13,123 ft.) |
| Relative Humidity | 0% RH ~ 100% RH |
| DC Connector | Amphenol Helios H4 |
| AC Connector | Waterproof Connector + OT/DT Terminal |
| Protection Degree | IP 66 |
| Topology | Transformerless |
| Nighttime Power Consumption | ≤ 5.5W |

| Standard Compliance (more available upon request) | |
|--|---|
| Safety | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683 |
| Grid Connection Standards | IEC 61727, VDE-AR-N4105, VDE 41 10, VDE 0126-1-1, BDEW, G59/3, UTE C 15-712-1, CEI 0-16, CEI 0-21, RD 661, RD 1699, P.O. 12.3, RD 413, EN-50438-Turkey, EN-50438-Ireland, C10/11, MEA, Resolution No.7, NRS 097-2-1, DEWA |

1. The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
2. Any DC input voltage beyond the operating voltage range may result in inverter improper operating.
3. SUN2000-30-50KTL-M3 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly), N-type (nPERT, HIT)

SUN2000-60KTL-M0 Smart PV Controller



Smart

12 strings intelligent monitoring



Efficient

Max. efficiency 98.7%



Safe


Fuse free design




Reliable

Type II surge arresters for DC & AC

Efficiency Curve

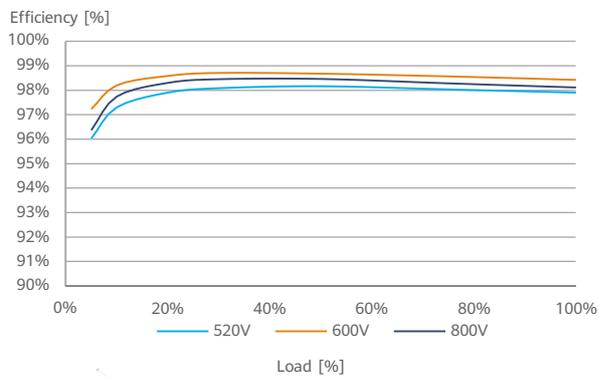

Circuit Diagram

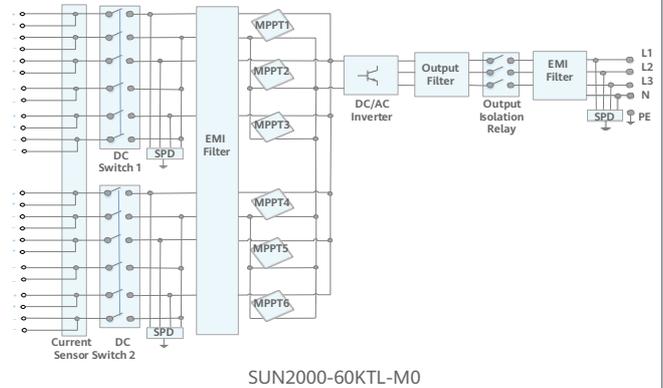

| | |
|-------------------------|------------------|
| Technical Specification | SUN2000-60KTL-MO |
|-------------------------|------------------|

| Efficiency | |
|---------------------|------------------------------------|
| Max. efficiency | 98.9% @480 V; 98.7% @380 V / 400 V |
| European efficiency | 98.7% @480 V; 98.5% @380 V / 400 V |

| Input | |
|---|--|
| Max. Input Voltage ¹ | 1,100 V |
| Max. Current per MPPT | 22 A (per MPPT) / 18 A (per Input) |
| Max. Short Circuit Current per MPPT | 30 A |
| Start Voltage | 200 V |
| MPPT Operating Voltage Range ² | 200 V ~ 1,000 V |
| Rated Input Voltage | 600 V @380 Vac / 400 Vac; 720 V @480 Vac |
| Number of MPP trackers | 6 |
| Max. input number per MPP tracker | 2 |

| Output | |
|--------------------------------|---|
| Rated AC Active Power | 60,000 W |
| Max. AC Apparent Power | 66,000 VA |
| Max. AC Active Power (cosφ=1) | 66,000 W |
| Rated Output Voltage | 220 V / 380 V, 230 V / 400 V, default 3W + N + PE; 3W + PE optional in settings; 277 V / 480 V, 3W + PE |
| Rated AC Grid Frequency | 50 Hz / 60 Hz |
| Rated Output Current | 91.2 A @380 V, 86.7 A @400 V, 72.2 A @480 V |
| Max. Output Current | 100 A @380 V, 95.3 A @400 V, 79.4 A @480 V |
| Adjustable Power Factor Range | 0.8 leading... 0.8 lagging |
| Max. Total Harmonic Distortion | < 3% |

| Protection | |
|------------------------------------|---------|
| Input-side Disconnection Device | Yes |
| Anti-islanding Protection | Yes |
| AC Overcurrent Protection | Yes |
| DC Reverse-polarity Protection | Yes |
| PV-array String Fault Monitoring | Yes |
| DC Surge Arrester | Type II |
| AC Surge Arrester | Type II |
| DC Insulation Resistance Detection | Yes |
| Residual Current Monitoring Unit | Yes |

| Communication | |
|-----------------------|--|
| Display | LED indicators; WLAN adaptor + FusionSolar APP |
| RS485 | Yes |
| USB | Yes |
| Monitoring BUS (MBUS) | Yes (isolation transformer required) |
| Smart Dongle-4G | 4G / 3G / 2G via Smart Dongle - 4G (Optional) |

| General Data | |
|------------------------------|--|
| Dimensions (W x H x D) | 1,075 x 555 x 300 mm (42.3 x 21.9 x 11.8 inch) |
| Weight (with mounting plate) | 74 kg (163.1 lb.) |
| Operating Temperature Range | -25°C ~ 60°C (-13°F ~ 140°F) |
| Cooling Method | Natural Convection |
| Max. Operating Altitude | 4,000 m (13,123 ft.) |
| Relative Humidity | 0 ~ 100% |
| DC Connector | Amphenol Helios H4 |
| AC Connector | Waterproof PG Terminal + Terminal Clamp |
| Protection Degree | IP65 |
| Topology | Transformerless |
| Nighttime Power Consumption | < 2 W |

| Standard Compliance (more available upon request) | |
|---|--|
| Certificate | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683 |
| Grid Connection Standards | IEC 61727, VDE-AR-N4105, VDE 0126-1-1, BDEW, VDE 4120, UTE C 15-712-1, CEI 0-16, CEI 0-21, RD 661, RD 1699, P.O. 12.3, RD 413, EN-50438-Turkey, EN-50438-Ireland, C10/11 |

*1 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
 *2 Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

SUN2000-100KTL-M1 Smart PV Controller



10
MPP Trackers



98.8% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve Diagnosis
Supported



MBUS
Supported





Fuse Free
Design



Surge Arresters for
DC & AC



IP66
Protection

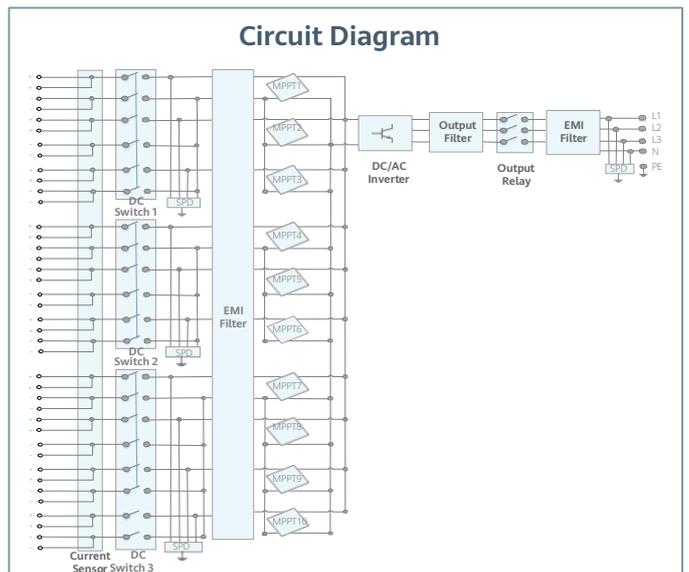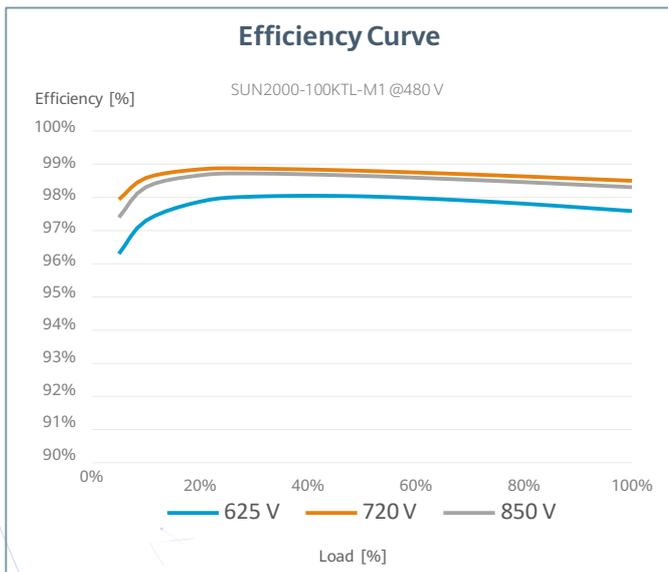

Technical Specification

SUN2000-100KTL-M1

Efficiency

| | |
|---------------------|------------------------------------|
| Max. efficiency | 98.8% @480 V, 98.6% @380 V / 400 V |
| European efficiency | 98.6% @480 V, 98.4% @380 V / 400 V |

Input

| | |
|---|--|
| Max. Input Voltage ¹ | 1,100 V |
| Max. Current per MPPT | 26 A (per MPPT) / 18 A (per Input) |
| Max. Short Circuit Current per MPPT | 40 A |
| Start Voltage | 200 V |
| MPPT Operating Voltage Range ² | 200 V ~ 1,000 V |
| Nominal Input Voltage | 720 V @480 Vac, 600 V @400 Vac, 570 V @380 Vac |
| Number of MPP trackers | 10 |
| Max. input number per MPP tracker | 2 |

Output

| | |
|--------------------------------|--|
| Nominal AC Active Power | 100,000 W |
| Max. AC Apparent Power | 110,000 VA |
| Max. AC Active Power (cosφ=1) | 110,000 W |
| Nominal Output Voltage | 480 V/ 400 V/ 380 V, 3W+(N)+PE |
| Rated AC Grid Frequency | 50 Hz / 60 Hz |
| Nominal Output Current | 120.3 A @480 V, 144.4 A @400 V, 152.0 A @380 V |
| Max. Output Current | 133.7 A @480 V, 160.4 A @400 V, 168.8 A @380 V |
| Adjustable Power Factor Range | 0.8 leading... 0.8 lagging |
| Max. Total Harmonic Distortion | < 3% |

Protection

| | |
|-------------------------------------|----------|
| Smart String-Level Disconnect(SSLD) | Yes |
| Anti-islanding Protection | Yes |
| AC Overcurrent Protection | Yes |
| DC Reverse-polarity Protection | Yes |
| PV-array String Fault Monitoring | Yes |
| DC Surge Arrester | Type II |
| AC Surge Arrester | Type II |
| DC Insulation Resistance Detection | Yes |
| Residual Current Monitoring Unit | Yes |
| Arc Fault Protection | Optional |

Communication

| | |
|-----------------------|--|
| Display | LED indicators; WLAN adaptor + FusionSolar APP |
| RS485 | Yes |
| USB | Yes |
| Smart Dongle-4G | 4G / 3G / 2G via Smart Dongle - 4G (Optional) |
| Monitoring BUS (MBUS) | Yes (isolation transformer required) |

General Data

| | |
|------------------------------|---------------------------------------|
| Dimensions (W x H x D) | 1,035 x 700 x 365 mm |
| Weight (with mounting plate) | 90 kg |
| Operating Temperature Range | -25°C ~ 60°C |
| Cooling Method | Smart Air Cooling |
| Max. Operating Altitude | 4,000 m (13,123 ft.) |
| Relative Humidity | 0 ~ 100% |
| DC Connector | Amphenol Helios H4 |
| AC Connector | Waterproof Connector + OT/DT Terminal |
| Protection Degree | IP66 |
| Topology | Transformerless |
| Nighttime Power Consumption | < 3.5 W |

Standard Compliance (more available upon request)

| | |
|---------------------------|---|
| Certificate | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 61727, IEC 60068, IEC 61683 |
| Grid Connection Standards | VDE-AR-N4105, VDE 4110, EN 50549-1, EN 50549-2, RD 661, RD 1699, C10/11 |

*1 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

*2 Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

SUN2000-100KTL-M2 Smart PV Controller



10
MPP Trackers



98.8% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve Diagnosis
Supported



MBUS
Supported





Support AFCI &
Smart String Level
Disconnecter



Surge Arresters for
DC & AC



IP66
Protection

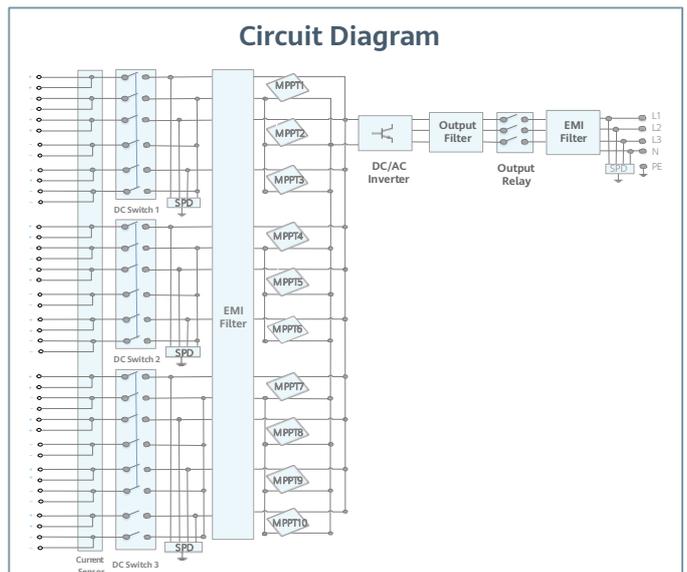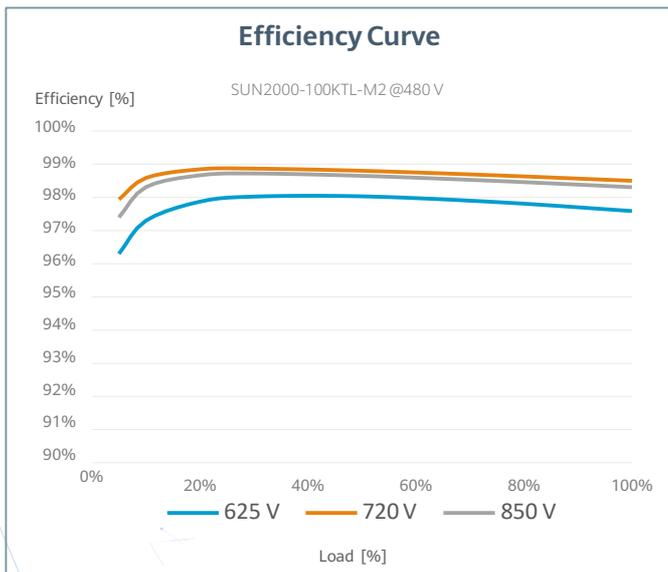

Technical Specification

SUN2000-100KTL-M2

Efficiency

| | |
|---------------------|------------------------------|
| Max. efficiency | 98.6% @ 400 V, 98.8% @ 480 V |
| European efficiency | 98.4% @ 400 V, 98.6% @ 480 V |

Input

| | |
|---|----------------------------------|
| Max. Input Voltage ¹ | 1,100 V |
| Max. Current per MPPT | 30 A |
| Max. Current per Input | 20 A |
| Max. Short Circuit Current per MPPT | 40 A |
| Start Voltage | 200 V |
| MPPT Operating Voltage Range ² | 200 V ~ 1,000 V |
| Nominal Input Voltage | 600 V @ 400 Vac, 720 V @ 480 Vac |
| Number of MPP trackers | 10 |
| Max. input number per MPP tracker | 2 |

Output

| | |
|--------------------------------|----------------------------------|
| Nominal AC Active Power | 100,000 W |
| Max. AC Apparent Power | 110,000 VA |
| Max. AC Active Power (cosφ=1) | 110,000 W |
| Nominal Output Voltage | 400 V/ 480 V, 3W+(N)+PE |
| Rated AC Grid Frequency | 50 Hz / 60 Hz |
| Nominal Output Current | 144.4 A @ 400 V, 120.3 A @ 480 V |
| Max. Output Current | 160.4 A @ 400 V, 133.7 A @ 480 V |
| Adjustable Power Factor Range | 0.8 leading... 0.8 lagging |
| Max. Total Harmonic Distortion | < 3% |

Protection

| | |
|------------------------------------|---------|
| Input-side Disconnection Device | Yes |
| Anti-islanding Protection | Yes |
| AC Overcurrent Protection | Yes |
| DC Reverse-polarity Protection | Yes |
| PV-array String Fault Monitoring | Yes |
| DC Surge Arrester | Type II |
| AC Surge Arrester | Type II |
| DC Insulation Resistance Detection | Yes |
| Residual Current Monitoring Unit | Yes |
| Arc Fault Protection | Yes |
| Smart String Level Disconnecter | Yes |

Communication

| | |
|-----------------------|--|
| Display | LED indicators; WLAN adaptor + FusionSolar APP |
| RS485 | Yes |
| USB | Yes |
| Smart Dongle-4G | 4G / 3G / 2G via Smart Dongle – 4G (Optional) |
| Monitoring BUS (MBUS) | Yes (isolation transformer required) |

General Data

| | |
|------------------------------|---------------------------------------|
| Dimensions (W x H x D) | 1,035 x 700 x 365 mm |
| Weight (with mounting plate) | 93 kg |
| Operating Temperature Range | -25°C ~ 60°C |
| Cooling Method | Smart Air Cooling |
| Max. Operating Altitude | 4,000 m (13,123 ft.) |
| Relative Humidity | 0 ~ 100% |
| DC Connector | Amphenol Helios H4 |
| AC Connector | Waterproof Connector + OT/DT Terminal |
| Protection Degree | IP66 |
| Topology | Transformerless |
| Nighttime Power Consumption | < 3.5 W |

Standard Compliance (more available upon request)

| | |
|--|---|
| Certificate | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 61727, IEC 60068, IEC 61683 |
| Grid Connection Standards ³ | VDE-AR-N4105, VDE 4110, EN 50549-1, EN 50549-2, RD 661, RD 1699, C10/11 |

¹ The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

² Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

SUN2000-115KTL-M2 Smart PV Controller



10
MPP Trackers



98.8% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve Diagnosis
Supported



MBUS
Supported





Support
Smart String Level
Disconnecter



Surge Arresters for
DC & AC



IP66
Protection

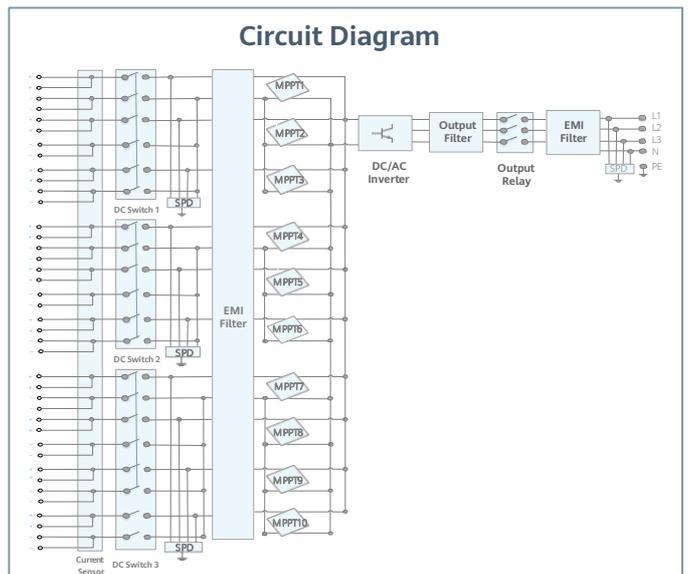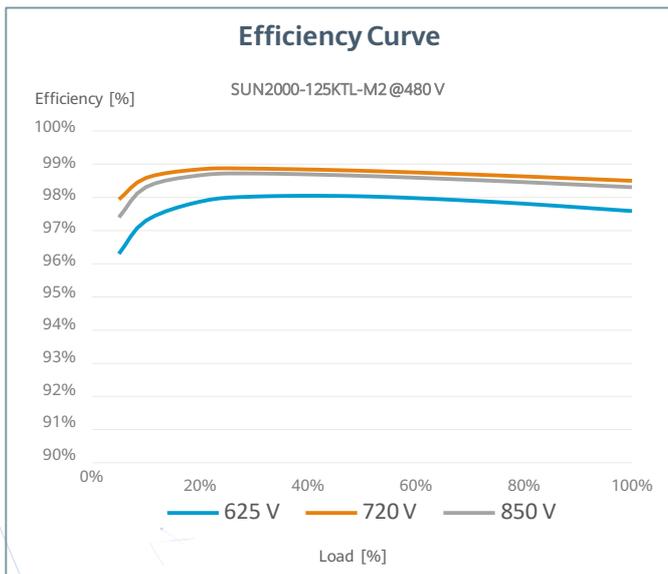

Technical Specification SUN2000-115KTL-M2

| Efficiency | |
|---------------------|----------------------------|
| Max. efficiency | 98.6% @400 V, 98.8% @480 V |
| European efficiency | 98.4% @400 V, 98.6% @480 V |

| Input | |
|---|--------------------------------|
| Max. Input Voltage ¹ | 1,100 V |
| Max. Current per MPPT | 30 A |
| Max. Current per Input | 20 A |
| Max. Short Circuit Current per MPPT | 40 A |
| Start Voltage | 200 V |
| MPPT Operating Voltage Range ² | 200 V ~ 1,000 V |
| Nominal Input Voltage | 600 V @400 Vac, 720 V @480 Vac |
| Number of MPP trackers | 10 |
| Max. input number per MPP tracker | 2 |

| Output | |
|--------------------------------|--------------------------------|
| Nominal AC Active Power | 115,000 W |
| Max. AC Apparent Power | 125,000 VA |
| Max. AC Active Power (cosφ=1) | 125,000 W |
| Nominal Output Voltage | 400 V / 480 V, 3W+(N)+PE |
| Rated AC Grid Frequency | 50 Hz / 60 Hz |
| Nominal Output Current | 166.0 A @400 V, 138.4 A @480 V |
| Max. Output Current | 182.3 A @400 V, 151.9 A @480 V |
| Adjustable Power Factor Range | 0.8 leading... 0.8 lagging |
| Max. Total Harmonic Distortion | < 3% |

| Protection | |
|------------------------------------|---------|
| Input-side Disconnection Device | Yes |
| Anti-islanding Protection | Yes |
| AC Overcurrent Protection | Yes |
| DC Reverse-polarity Protection | Yes |
| PV-array String Fault Monitoring | Yes |
| DC Surge Arrester | Type II |
| AC Surge Arrester | Type II |
| DC Insulation Resistance Detection | Yes |
| Residual Current Monitoring Unit | Yes |
| Smart String Level Disconnecter | Yes |

| Communication | |
|-----------------------|--|
| Display | LED indicators; WLAN adaptor + FusionSolar APP |
| RS485 | Yes |
| USB | Yes |
| Smart Dongle-4G | 4G / 3G / 2G via Smart Dongle - 4G (Optional) |
| Monitoring BUS (MBUS) | Yes (isolation transformer required) |

| General Data | |
|------------------------------|---------------------------------------|
| Dimensions (W x H x D) | 1,035 x 700 x 365 mm |
| Weight (with mounting plate) | 93 kg |
| Operating Temperature Range | -25°C ~ 60°C |
| Cooling Method | Smart Air Cooling |
| Max. Operating Altitude | 4,000 m (13,123 ft.) |
| Relative Humidity | 0 ~ 100% |
| DC Connector | Amphenol Helios H4 |
| AC Connector | Waterproof Connector + OT/DT Terminal |
| Protection Degree | IP66 |
| Topology | Transformerless |
| Nighttime Power Consumption | < 3.5 W |

| Standard Compliance (more available upon request) | |
|---|---|
| Certificate | EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 61727, IEC 60068, IEC 61683 |
| Grid Connection Standards | VDE-AR-N4105, VDE 4110, EN 50549-1, EN 50549-2, RD 661, RD 1699, C10/11 |

*1 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
 *2 Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

SmartLogger3000A



Smart

Smart zero export control design



Simple

Easy to install on site



Reliable

Safety by lightning protection module

| Technical Specification | SmartLogger3000A03EU | SmartLogger3000A01EU |
|------------------------------------|--|---------------------------------|
| Device Management | | |
| Max. Number of Connected Devices | 80 | |
| Communication Interface | | |
| WAN | WAN x 1, 10 / 100 / 1000 Mbps | |
| LAN | LAN x 1, 10 / 100 / 1000 Mbps | |
| RS485 | COM x 3, 1200 / 2400 / 4800 / 9600 / 19200 / 115200 bps, 1000 m | |
| MBUS | MBUS x 1, 115.2 kbps, Compatible with PLC | No MBUS Communication Interface |
| 2G / 3G / 4G ¹ | LTE(FDD): B1,B2,B3,B4,B5,B7,B8,B20 DC-HSPA+/HSPA+/HSPA/UMTS: 850/900/1900/2100 MHz GSM/GPRS/EDGE: 850/900/1800/1900 MHz ² | |
| Digital / Analog Input / Output | DI x 4, DO x 2, AI x 4 | |
| Active DO | 12V, 100mA (connection with relay, sensor) | |
| Communication Protocol | | |
| Ethernet | Modbus-TCP, IEC 60870-5-104 | |
| RS485 | Modbus-RTU, IEC 60870-5-103 (standard), DL / T645 | |
| Interaction | | |
| LED | LED Indicator x 3 – RUN, ALM, 4G | |
| WEB | Embedded Web | |
| USB | USB 2.0 x 1 | |
| APP | Communication by WLAN for Commissioning | |
| Environment | | |
| Operating Temperature Range | -40°C ~ 60°C (-40°F ~ 140°F) | |
| Storage Temperature | -40°C ~ 70°C (-40°F ~ 158°F) | |
| Relative Humidity (Non-condensing) | 5% ~ 95% | |
| Max. Operating Altitude | 4,000 m (13,123 ft.) | |
| Electrical | | |
| AC Power Supply | 100 V ~ 240 V, 50 Hz / 60 Hz | |
| DC Power Supply | 12 V / 24 V | |
| Power Consumption | Typical 8 W, Max. 15 W | |
| Mechanical | | |
| Dimensions (W x H x D) | 225 x 160 x 44 mm (8.9 x 6.3 x 1.7 inch, without mounting ears and antenna) | |
| Weight | 2 kg (4.4 lb.) | |
| Protection Degree | IP20 | |
| Installation Options | Wall Mounting, DIN Rail Mounting, Tabletop Mounting | |

*1: When putting inside metal box, extended antenna will be needed.

*2: For recommended carriers list and details on supported frequencies, please contact local distributors.

FusionSolar Smart PV Management System



Better experience

- One APP for all access procedure
- Auto-definition of local components
- Module auto-mapping within 5s



Energy visualization


- KPI Dashboard, centralized management of multiple plants
- Module-level monitoring
- Report subscription and real-time alarm push




Smart O&M

- One-screen mgmt. of site, personnel, status
- One-click ticket dispatching & site navigation
- Online Smart I-V Curve Diagnosis, 15mins required for a 100MW plant diagnosis

Networking

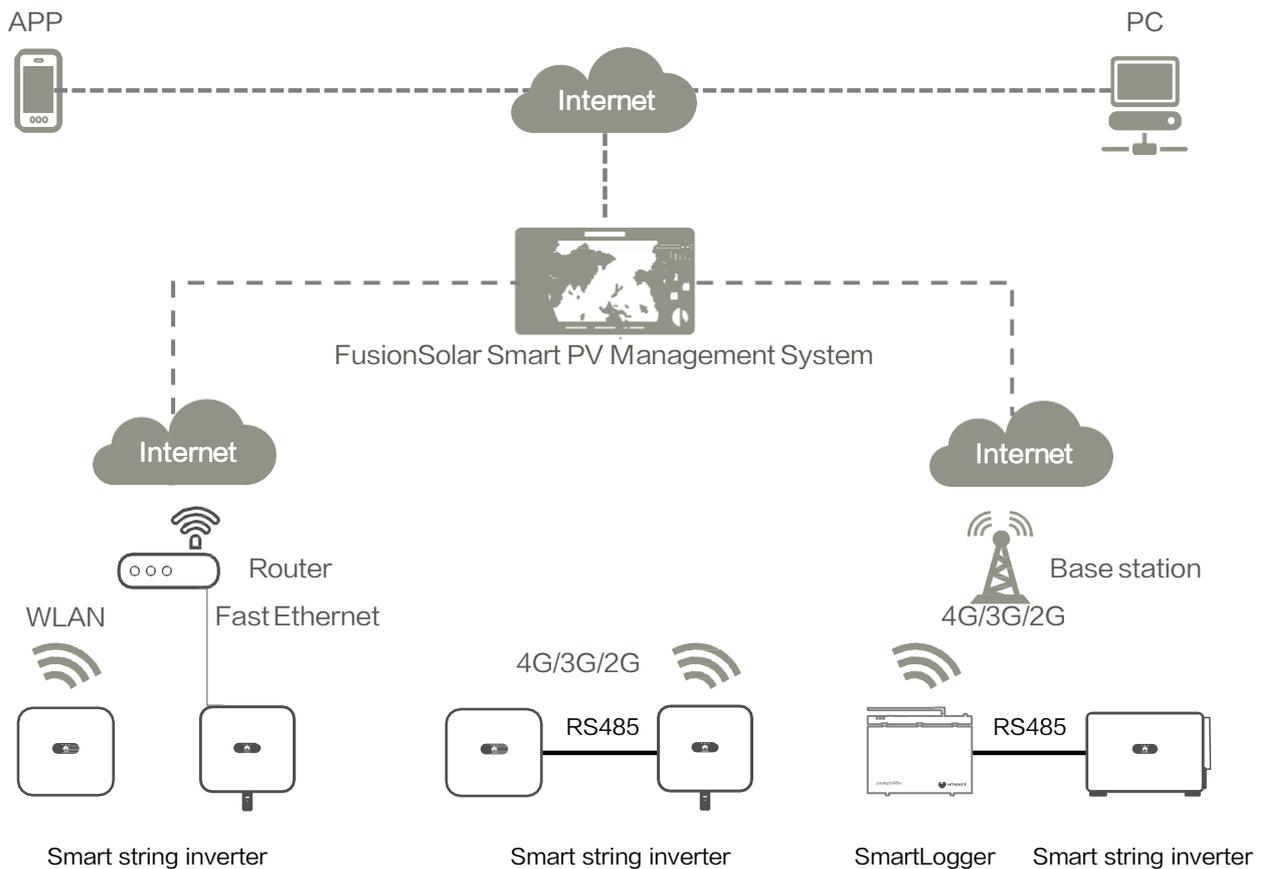


FusionSolar Smart PV Management System

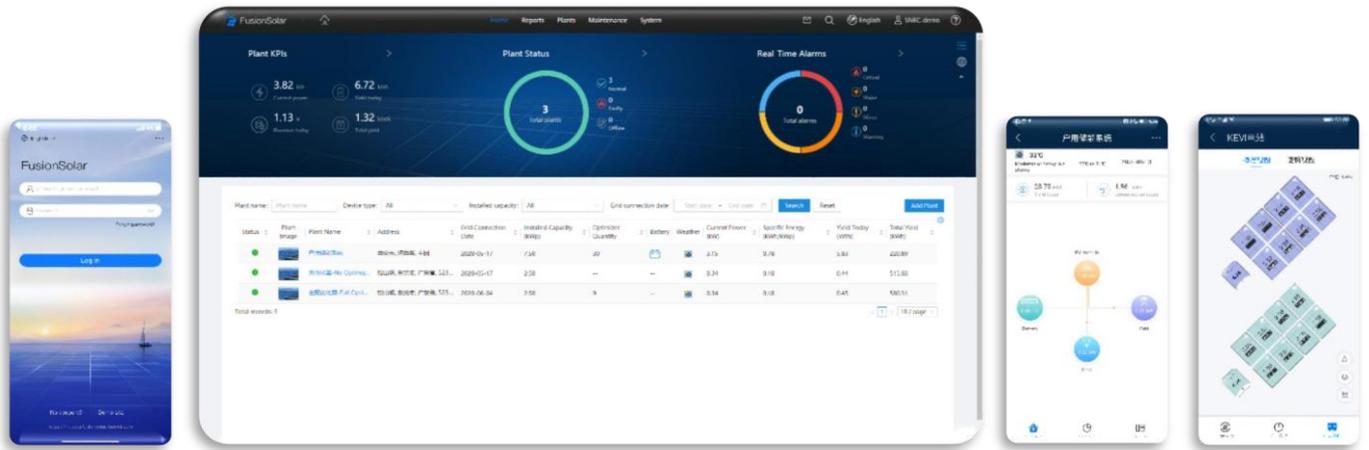

| Category | Function | Web | APP |
|--------------------------|--------------------------|-----|-----|
| Homepage | PV Plants List | ● | ● |
| | Add Plant | ● | ● |
| Report Management | Plant Report | ● | |
| | Inverter Report | ● | |
| | Battery Report | ● | |
| Device Management | Device Details | ● | ● |
| | Remote Parameter Setting | ● | |
| | Remote Optimizer Search | ● | |
| Intelligent O&M | Real-time Status | ● | |
| | Alarm Management | ● | ● |
| | Task Management | ● | ● |
| | Smart IV-Curve Diagnose | ● | |
| KPI Dashboard | KPI Dashboard | ● | |
| Homepage of Single Plant | Energy Flow | ● | ● |
| | Energy Management | ● | ● |
| | Plant Layout | ● | ● |
| | Kiosk Mode | ● | |
| System Setting | Plant Management | ● | ● |
| | Company Management | ● | |
| Demo | Demo Site | ● | ● |

Smart I-V Curve Diagnosis

Smart I-V Curve Diagnosis is able to carry out online I-V curve analysis on entire strings with advanced diagnosis algorithm. The scanning would help to find out and identify the strings with low performance or faults, which would help to achieve proactive maintenance, higher O&M efficiency and lower operation cost.

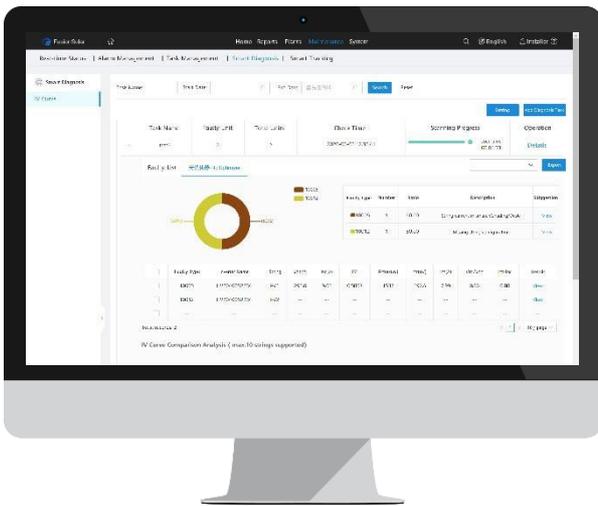

Smart


- Support plant-level, array-level and inverter-level analysis and diagnosis
- Automatically identify different failure types and provide recovery suggestion



Efficient

- One-click scanning without onsite experts or equipment
- Online I-V curve scanning on entire strings of 5 MW plant within 5min
- Automatic report generation of 5 MW plant within 15min



Network

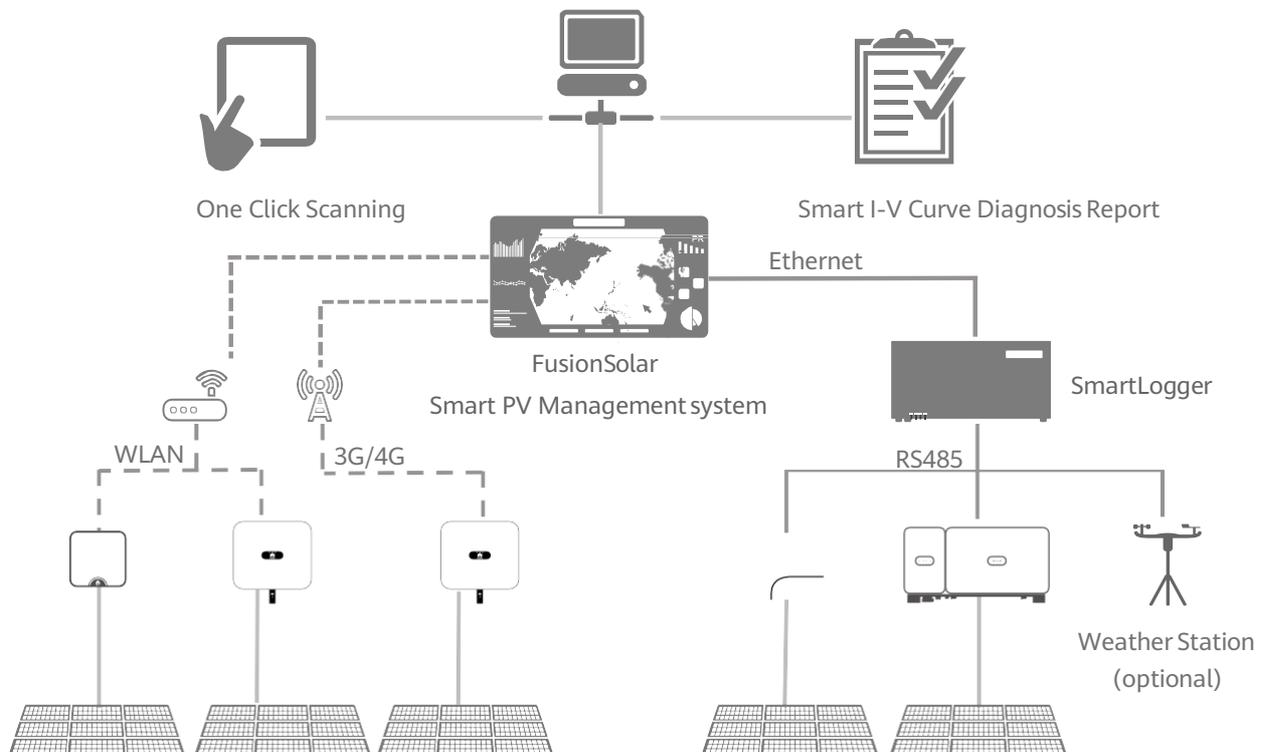




Smart I-V Curve Diagnosis


| Technical Specifications | Smart I-V Curve Diagnosis | |
|-------------------------------|--|-----|
| Smart PV Inverter | SUN2000-2/3/3.68/4/4.6/5/6KTL-L1*, SUN2000-3/4/5/6/8/10KTL-M0, SUN2000-12/15/17/20KTL-M0, SUN2000-33KTL-A/36KTL, SUN2000-60KTL-M0, SUN2000-100KTL-M1 | |
| Communication | SmartLogger3000A, Smart Dongle-WLAN-FE/4G | |
| Management System | FusionSolar Smart PV Management System, NetEco1000s | |
| Scanning Time | < 1s (1 string) | |
| Sampling Points per I-V Curve | 128 | |
| Certification |  TÜVRheinland® | TUV |

* I-V curve diagnosis is not supported when inverter is connected with power optimizer.
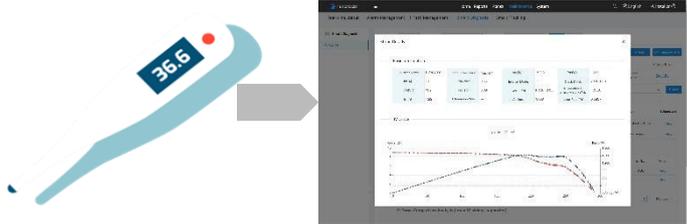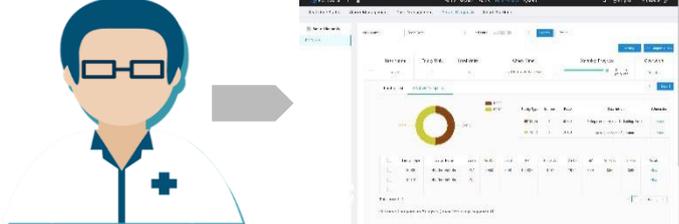
| String-level Management | Smart I-V Curve Diagnosis |
|--|---|
|  <p>Real time monitoring</p> |  <p>Fault Analysis</p> |

String I-V Curve Comparison

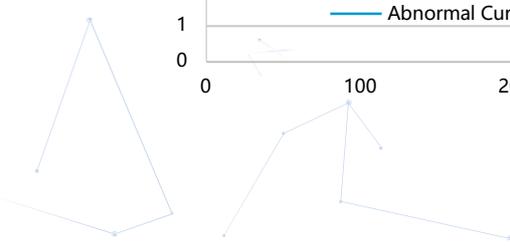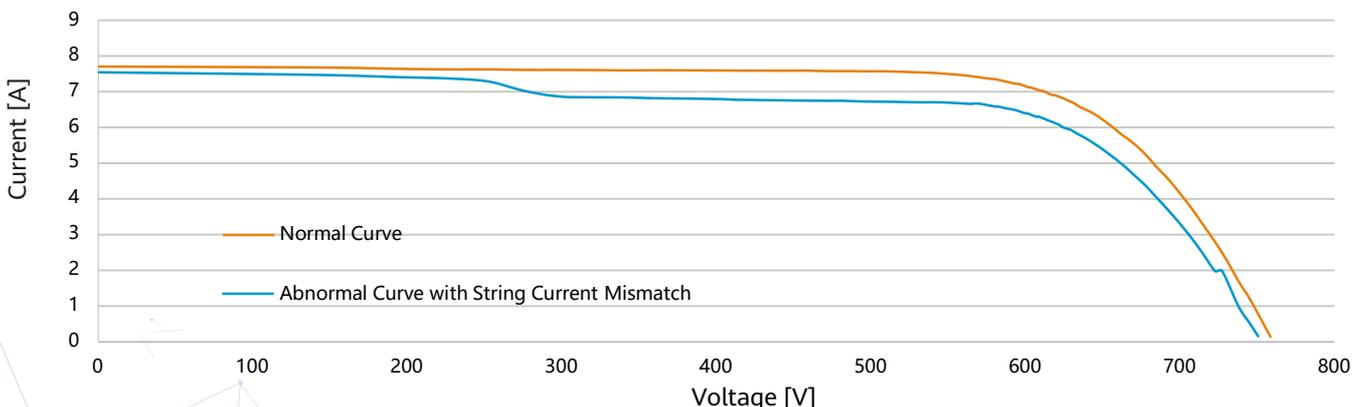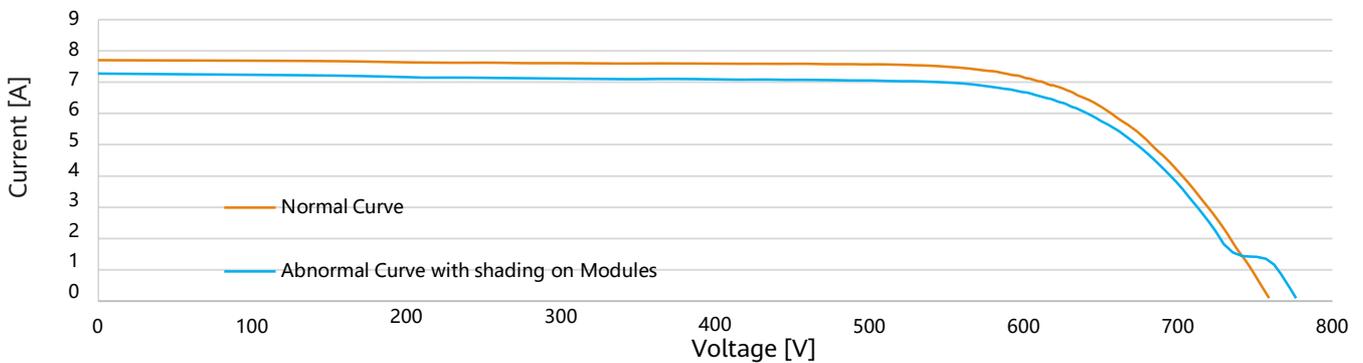

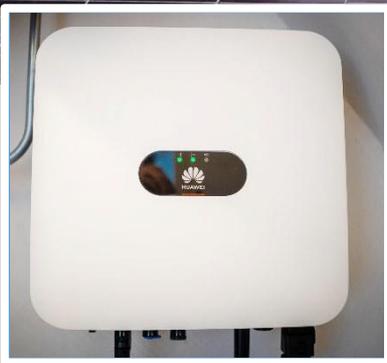

1.8kWp


Residential PV System in Amsterdam, Netherlands

System Configuration

- 6 × 300Wp modules
- 6 × 450W optimizers
- SUN2000L-2KTL-L1

COD

July, 2020

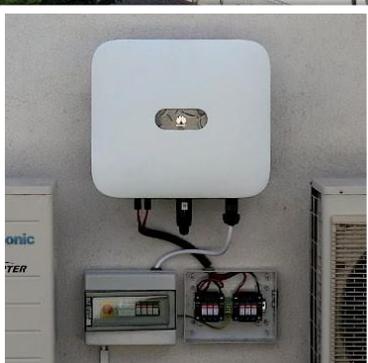

25kWp

Residential PV System in Hungary

System Configuration

- 84 × 295Wp modules
- SUN2000-20KTL-M0

COD

May, 2019



12KWp

Residential PV System in Oosterzele, Belgium

COD
Mar 2016

System Configuration

- 36 × 340Wp Modules
- SUN2000-8KTL-M0



33kWp

Residential PV system in Hanadacho Chokushi, Japan

COD
April, 2018

System Configuration

- 120 × 275Wp modules
- 8 × SUN2000L-4.125KTL-JP
- SmartACBox12in1



85.8KWp

Distributed PV System in Brazil

System Configuration

- 264 x 325Wp modules
- 2 x SUN2000-36KTL

COD
Feb, 2018



2.8MWp

Distributed PV system at Singapore Changi Airport

System Configuration

- SUN2000-36KTL

COD
Dec, 2016



1MWp

Distributed PV System in Kuala Lumpur, Malaysia

System Configuration

- SUN2000-36KTL

COD

Mar 2016



1.25MWp

Distributed PV System in South Africa

System Configuration

- SUN2000-60KTL

COD

Sep, 2019



Copyright © Huawei Technologies Co., Ltd.2020 All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

 , HUAWEI and  are trademarks or registered remarks of Huawei Technologies Co., Ltd. Other trademarks, product service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES Dusseldorf GmbH
Südwestpark 37,90449 Nürnberg, Deutschland
Hotline: +80 03 38 88 888
Email: eu_inverter_support@huawei.com

HUAWEI TECHNOLOGIES CO., LTD.
Huawei Industrial Base, Bantian Longgang
Shenzhen 518129, P.R. China
Tel: 400-822-9999
Version No.: 04-(20201006)
solar.huawei.com